



Pressure screw

Configuration

Connecting thread

Pg as per DIN 40430


Properties

Temperature range

-30°C / +100°C

Protection grade

dependent on the combination with other components

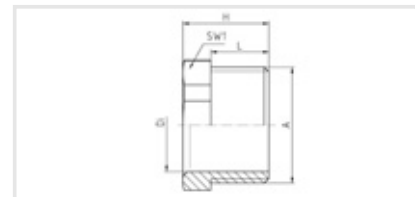

Characteristics

A	L	SW	H	Di	VPE	Art.-Nr. / Part No.
	mm	mm	mm	mm		
Pg 7	8,5	13	13,5	7	lose	0807 PA
Pg 9	8,5	16	13,5	9,5	lose	0809 PA
Pg 11	10	19	15	11,5	lose	0811 PA
Pg 13,5	10,5	21	15,5	13	lose	0813 PA
Pg 16	11,5	23	17,5	15,5	lose	0816 PA
Pg 21	13,5	30	19,5	20,5	lose	0821 PA
Pg 29	14,5	40	21,5	27	lose	0829 PA
Pg 36	17	50	25	34	lose	0836 PA
Pg 42	18,5	55	27,5	40	lose	0842 PA
Pg 48	18	60	27	45	lose	0848 PA

Jacob GmbH
 Elektrotechnische Fabrik
 Gottlieb-Daimler-Str. 11
 71394 Kernen
 GERMANY
 Telefon +49 (0)7151 4011-0
 Fax +49 (0)7151 4011-49

E-Mail jacob@jacob-gmbh.de
www.jacob-gmbh.de