



- Cable glands and accessories with metric thread
- Cable glands and accessories with Pg-thread
- Cable glands and accessories with NPT- and gas pipe thread
- Explosion-proof cable glands and accessories acc. to ATEX
- HAWKE products
- Technical information

Cable Glands | Measuring devices and controls

- Brass
- Stainless Steel
- Zinc die-casting
- Plastics
- Accessories from other materials
- Cable gland
- Accessories
- PERFECT
- PERFECT EMV
- WADI
- UNI Dicht
- KOMPAKT
- FAVORIT
- Cable gland with clamping jaw
- Basic
- Flat cable gland

## KOMPAKT cable gland rubber bushing /

[Characteristics / Overview](#)

## Configuration

Strain relief clamp	Brass, nickel-plated
Bolts	Stainless steel
Washers	Steel, zinc-plated
Rubber bushing	Chloropren rubber CR
Gland body	Brass CuZn39Pb3, nickel-plated
Connecting thread	metric as per EN 60423

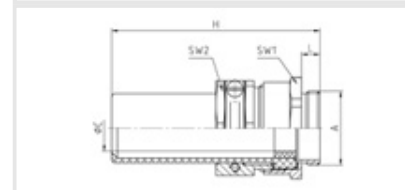
## Properties

Temperature range	-30°C / +100°C
Protection grade	IP55
Comment	connecting thread long possible on request

## Characteristics

## Connecting thread standard length

A	C mm	L mm	SW1 mm	SW2 mm	H mm	VPE	Art.-Nr. / Part No.
M12x1,5	4,5 - 7	6	17	17	58	50	19.609M12K
M16x1,5	6,5 - 9	6	20	20	58	50	19.611M16K
M20x1,5	6,5 - 9	6,5	22	22	58,5	50	19.611M20K
M20x1,5	6 - 11,5	6,5	22	22	63,5	50	19.613M20K
M25x1,5	8 - 13	7	27	24	69	25	19.616M25K
M25x1,5	12,5 - 18	7	30	30	79,5	25	19.621M25K
M32x1,5	17 - 26	8	40	41	90,5	10	19.629M32K
M40x1,5	17 - 26	8	43	41	90,5	10	19.629M40K
M50x1,5	27 - 32	9	55	50	102	5	19.636M50K
M50x1,5	35 - 38,5	9	57	57	113	5	19.642M50K
M63x1,5	38 - 44	10	65	64	114	5	19.648M63K

[Metric catalogue download \(8,5 MB\)](#)[Pg. NPT catalogue download \(7,4 MB\)](#)[General terms and conditions](#)[Metal surcharge](#)[Ex-catalogue \(english\) download](#)[Ex catalogue download \(2,1 MB\)](#)

Search

[Imprint](#)[Privacy](#)[Print](#)