

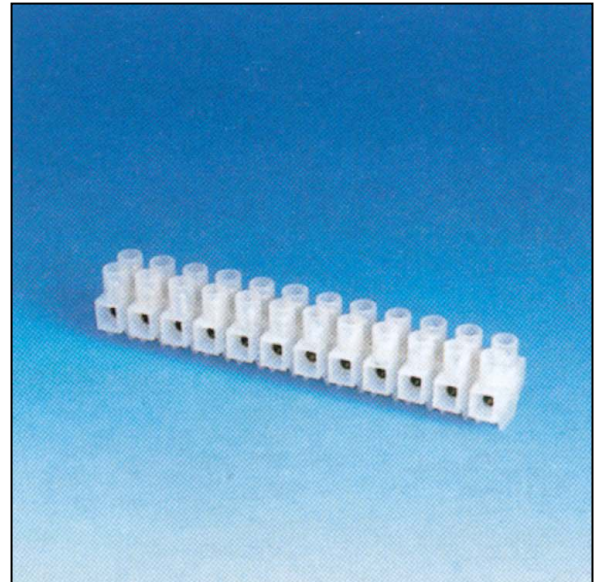





**Euro-connector-block 2,5 mm², divisible
1 - 12-poles, raised base,
solid fixing-strip,
also with wire-protection (DS)**


Casing : white polyamide
Pillar : nickel-plated brass
Screw : M 3 zinc-plated steel
Wire-protection : chrome-nickel-steel

This connector is available from 1 - 12-poles or can be cut according to your requirements. Delivery will be effected ready for installation with slightly twisted screws, which are protected against self-loosening in the insulation-part.

Accessories as description-labels and components are available.



| | | | | | |
|---------------------------|---------|------|--|--|---|
| 24A 450V | PTI 250 | T125 |  0.5mm ² -2.5mm ² |  0.5mm ² -2.5mm ² |  L=5mm-5.5mm |
|---------------------------|---------|------|--|--|---|



| No. of poles | Length | Article-no. | kg/100 pcs. | Article-no. with DS | kg/100 pcs. | Pkg. qty. |
|--------------|--------|-------------|-------------|---------------------|-------------|-----------|
| 1 | 6,00 | 1013480001 | 0,19 | 1013482001 | 0,19 | 1000 |
| 2 | 14,00 | 1013480002 | 0,38 | 1013482002 | 0,39 | 1000 |
| 3 | 22,00 | 1013480003 | 0,57 | 1013482003 | 0,58 | 500 |
| 4 | 30,00 | 1013480004 | 0,76 | 1013482004 | 0,78 | 500 |
| 5 | 38,00 | 1013480005 | 0,95 | 1013482005 | 0,97 | 500 |
| 6 | 46,00 | 1013480006 | 1,14 | 1013482006 | 1,17 | 250 |
| 7 | 54,00 | 1013480007 | 1,33 | 1013482007 | 1,36 | 250 |
| 8 | 62,00 | 1013480008 | 1,52 | 1013482008 | 1,56 | 250 |
| 9 | 70,00 | 1013480009 | 1,71 | 1013482009 | 1,75 | 100 |
| 10 | 78,00 | 1013480010 | 1,90 | 1013482010 | 1,95 | 100 |
| 11 | 86,00 | 1013480011 | 2,10 | 1013482011 | 2,15 | 100 |
| 12 | 94,00 | 1013480012 | 2,30 | 1013482012 | 2,35 | 100 |

