

Terminal blocks

to Type 236

- Type 217** page 101
- Type 218** page 101
- Type 251** page 99

Accessories for Type 236

Coding set
700024 page 190


Type 236

Header, centerline 5.08 mm / 0.200 inches, horizontal mounting, square contact pins 1 mm / 0.039 inches, mounting flange, codable

Technical Data

	V / A	300 / 15		
		400 V / 4 kV / 10 A		
Insulation co-ordination according to EN 60664-1				
Clearance and creepage distances min. 4.08 mm				
Insulating material class CTI 600				
Overvoltage category III III II				
Pollution degree 3 2 2				
Rated voltage 320 800 800				
Rated test voltage 4 6 4				
Protection category according to IEC 60529 IP00				
Solder pin dimension 1.0 x 1.0 mm				
Recommended pc board hole dia. Ø 1.5 mm				
Solder pin length 3.45 mm				
Pole size 2 - 24				
Colour black				

Dimensions in mm 1 mm = 0.0394 in.

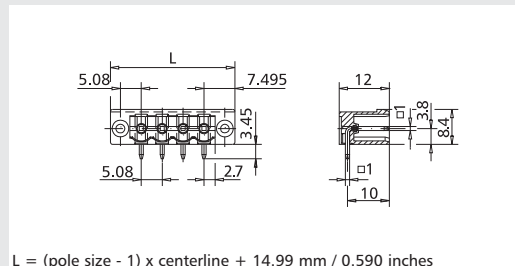

$L = (\text{pole size} - 1) \times \text{centerline} + 14.99 \text{ mm} / 0.590 \text{ inches}$

Part numbers (P/N)

(informations: page 110)

Complete the part number by adding the pole size.

Type 236

centerline 5.08 mm / 0.200 inches

P/N 312361

	02	03	04	05	06	07	08
09	10	11	12	13	14	15	16
17	18	19	20	21	22	23	24

Type 236

centerline 10.16 mm / 0.400 inches

P/N 312362

	02	03	04	05	06	07	08
09	10	11	12				

- Standard pole sizes
- Available on demand. Minimum order quantity 5000 pieces per item.