

Terminal blocks

to **Type 318**

Type 157 page 91

to **Type 417**

ASP025 page 47

Type 007 page 89

Type 077 page 89

Type 107 page 90

Type 318

Header, centerline 5 mm / 0.197 inches, vertical mounting, designed for SMT, Tape on Reel packaging for automated processing, round contact pins 1.02 mm / 0.040 inches

Technical Data

130 V / 2.5 kV / 10 A

Insulation co-ordination according to EN 60664-1			
Clearance and creepage distances	min. 2.5 mm		
Insulating material class	CTI 400		
Overvoltage category	III	III	II
Pollution degree	3	2	2
Rated voltage	160	320	320
Rated test voltage	2.5	4	2.5
Protection category according to IEC 60529			
	IP00		
Solder pin dimension	2.5 mm		
Pole size	2 - 12		
Colour	black		

Type 417


Header, centerline 5 mm / 0.197 inches, vertical mounting, designed for SMT, Tape on Reel packaging for automated processing, round contact pins 1.3 mm / 0.051 inches

Technical Data


130 V / 2.5 kV / 12 A

Insulation co-ordination according to EN 60664-1			
Clearance and creepage distances	min. 2.5 mm		
Insulating material class	CTI 400		
Overvoltage category	III	III	II
Pollution degree	3	2	2
Rated voltage	160	320	320
Rated test voltage	2.5	4	2.5
Protection category according to IEC 60529			
	IP00		
Solder pin dimension	2.5 mm		
Pole size	2 - 12		
Colour	black		

Dimensions in mm 1 mm = 0.0394 in.

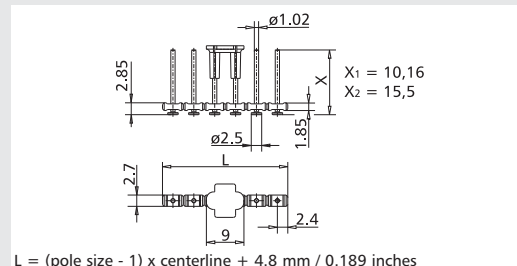

Dimensions in mm 1 mm = 0.0394 in.

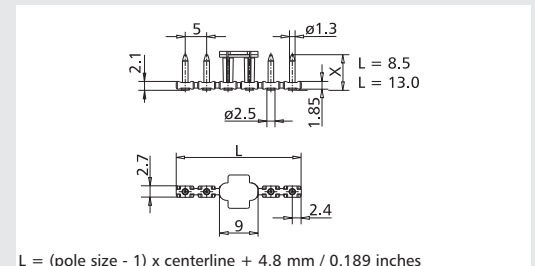

Part numbers (P/N)

(informations: page 110)

Complete the part number by adding the pole size.

Type 318

centerline 5 mm / 0.197 inches

P/N 313181

	02	03	04	05	06	07	08
	09	10	11	12			

Part numbers (P/N)

(informations: page 110)

Complete the part number by adding the pole size.

Type 417

centerline 5 mm / 0.197 inches

P/N 314171

	02	03	04	05	06	07	08
	09	10	11	12			

* approval pending

* approval pending

Standard pole sizes

Available on demand. Minimum order quantity 5000 pieces per item.

Standard pole sizes

Available on demand. Minimum order quantity 5000 pieces per item.