



Headers



to ASP043

-  **Type 188** page 121
-  **Type 189** page 119
-  **Type 342** page 120
-  **Type 343** page 118


ASP043

Spring clamp terminal block, pluggable, centerline 3.5 mm / 0.138 inches, wire entry parallel to plug direction

Technical Data

 V / A / AWG	300 / 8 / 28 - 16		
 0.08 - 1.5 mm ²	130 V / 2.5 kV / 10 A		
Insulation co-ordination according to EN 60664-1			
Clearance and creepage distances	min. 2.3 mm		
Insulating material class	CTI 400		
Overvoltage category	III	III	II
Pollution degree	3	2	2
Rated voltage	160	320	320
Rated test voltage	2.5	4	2.5
Protection category according to IEC 60529			
	IP20		
Min. insul. strip length	6 mm		
Pole size	2 - 12		
Colour	black		

Dimensions in mm 1 mm = 0.0394 in.

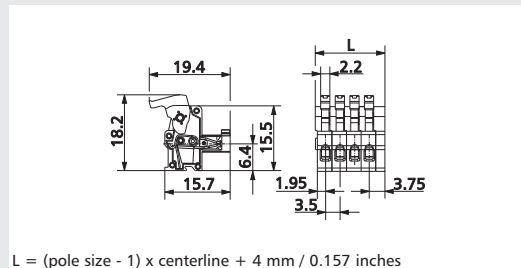

Part numbers (P/N)

(informations: page 16)

Complete the part number by adding the pole size.

ASP043

centerline 3.5 mm / 0.138 inches

P/N ASP043

	02	03	04	05	06	07	08
	09	10	11	12			

- Standard pole sizes
- Available on demand. Minimum order quantity 5000 pieces per item.