

Terminal blocks

to Type 266
 Type 262 page 102

Accessories
 for Type 266
 Coding set
 700024 page 190


Type 266

Header, centerline 7.62 mm / 0.300 inches, horizontal mounting, squarecontact pins 1 mm / 0.039 inches, closed ends, codable

Technical Data

	V / A	300 / 15		
		500 V / 6 kV / 10 A		
Insulation co-ordination according to EN 60664-1				
Clearance and creepage distances min. 6.6 mm				
Insulating material class CTI 600				
Overvoltage category III III II				
Pollution degree 3 2 2				
Rated voltage 500 1250 1250				
Rated test voltage 4 8 6				
Protection category according to IEC 60529 IP00				
Solder pin dimension 1.0 x 1.0 mm				
Recommended pc board hole dia. Ø 1.5 mm				
Solder pin length 3.45 mm				
Pole size 2 - 12				
Colour black				

Dimensions in mm 1 mm = 0.0394 in.

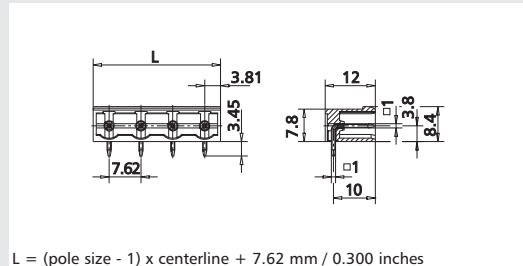

$L = (\text{pole size} - 1) \times \text{centerline} + 7.62 \text{ mm} / 0.300 \text{ inches}$

Part numbers (P/N) (informations: page 110)

Complete the part number by adding the pole size.

Type 266

centerline 7.62 mm / 0.300 inches

P/N 312661

	02	03	04	05	06	07	08
<input type="checkbox"/>	09	10	11	12			

- Standard pole sizes
- Available on demand. Minimum order quantity 5000 pieces per item.