


## 1013513005

5 Pole glass-fibre reinforced polyamide barrier with wire protection insert pillar terminal block 10 mm pitch 32a 450v

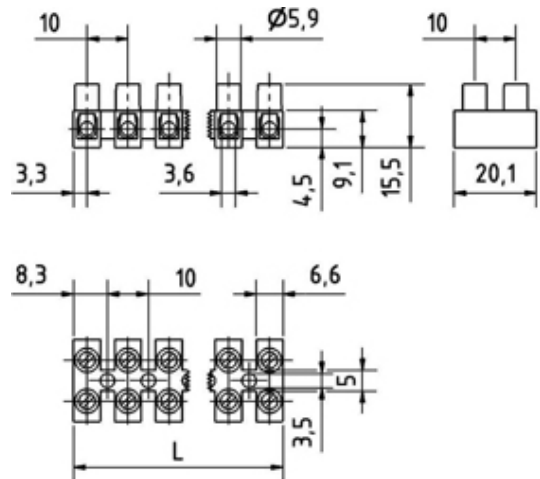

### SPECIFICATION

<b>Number of Poles</b>	5
<b>Terminal Material</b>	Nickel-plated brass
<b>Terminal Type</b>	Barrier with wire protection
<b>Body Material</b>	Polyamide, glass fibre reinforced
<b>Colour</b>	White
<b>Glow Wire Resistance Test Temp</b>	750 C Flame < 2 Sec (IEC/EN60335-1)
<b>Base Type</b>	Standard
<b>Min Conductor Size (Sq mm)</b>	0.75
<b>Max Conductor Size (Sq mm)</b>	4
<b>Max Current (A)</b>	32
<b>Max Voltage (V)</b>	450
<b>Working Temperature</b>	T150
<b>Pitch (mm)</b>	10
<b>Length (mm)</b>	47
<b>Comments</b>	1) Assembly-bore : Diameter 3.5mm , 2) Photo is just a representative of terminal block, see line drawing
<b>Terminal Screw Material</b>	M 3 zinc-plated steel
<b>Tracking Resistance CTI (v)</b>	250
<b>Wire Protection Material</b>	Chrome-nickel-steel