


# Thermal Overload Relays

## Range: Motor Control Gear

Order Code: DETH-1.05

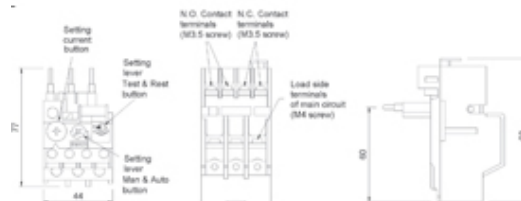

### DESCRIPTION

Thermal Overload Relay - Setting Range (A) 0.75-1.05

### MOTOR CONTROL GEAR FEATURES

- Screw terminals IP20 finger protected.
- C/W Lockable & Sealable MAN/AUTO Switch.
- Combi Head Ready open terminals ready to tighten screws.
- 1 minute self reset when tripped.
- Lightweight and simple to use.

*Subject to technical modification without notice.*

*Typographical and other errors do not justify claim for damages.*

## SPECIFICATION

Weight	0.14
Length (mm)	93
Width (mm)	44
Height (mm)	77
Aux Contact Number	2
Aux Contact Type	N/O + N/C
Body Material	Bakelite
Contact Type	DEC-11D
Rated insulation voltage (Ui) VAC	600
Rated thermal current (Ith) A	6
Relay Setting Range	0.75-1.05
Series	DETH

## INDUSTRY ACCREDITATIONS

