


Thermal Overload Relays

Range: Motor Control Gear

Order Code: DETH-1.45

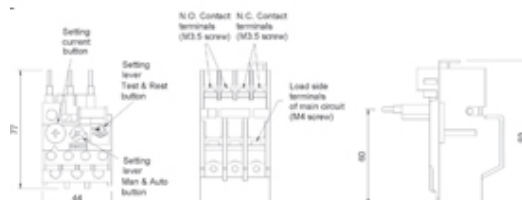

DESCRIPTION

Thermal Overload Relay - Setting Range (A) 1.05-1.45

MOTOR CONTROL GEAR FEATURES

- Screw terminals IP20 finger protected.
- C/W Lockable & Sealable MAN/AUTO Switch.
- Combi Head Ready open terminals ready to tighten screws.
- 1 minute self reset when tripped.
- Lightweight and simple to use.

Subject to technical modification without notice.

Typographical and other errors do not justify claim for damages.

SPECIFICATION

Weight	0.14
Length (mm)	93
Width (mm)	44
Height (mm)	77
Aux Contact Number	2
Aux Contact Type	N/O + N/C
Body Material	Bakelite
Contactor Type	DEC-11D
Rated insulation voltage (Ui) VAC	600
Rated thermal current (Ith) A	6
Relay Setting Range	1.05-1.45
Series	DETH

INDUSTRY ACCREDITATIONS

