


# Thermal Overload Relays

## Range: Motor Control Gear

Order Code: DETH-14

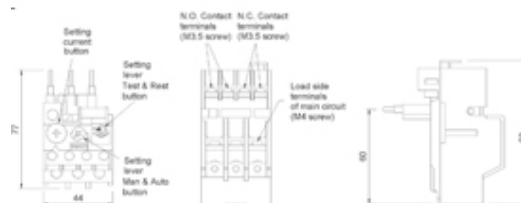

### DESCRIPTION

Thermal Overload Relay - Setting Range (A) 11-14

### MOTOR CONTROL GEAR FEATURES

- Screw terminals IP20 finger protected.
- C/W Lockable & Sealable MAN/AUTO Switch.
- Combi Head Ready open terminals ready to tighten screws.
- 1 minute self reset when tripped.
- Lightweight and simple to use.

*Subject to technical modification without notice.*

*Typographical and other errors do not justify claim for damages.*

## SPECIFICATION

|  |                 |
|--|-----------------|
| <b>Weight</b>                            | 0.14            |
| <b>Length (mm)</b>                       | 93              |
| <b>Width (mm)</b>                        | 44              |
| <b>Height (mm)</b>                       | 77              |
| <b>Aux Contact Number</b>                | 2               |
| <b>Aux Contact Type</b>                  | N/O + N/C       |
| <b>Body Material</b>                     | Bakelite        |
| <b>Contact Type</b>                      | DEC-11D/DEC-12D |
| <b>Rated insulation voltage (Ui) VAC</b> | 600             |
| <b>Rated thermal current (Ith) A</b>     | 6               |
| <b>Relay Setting Range</b>               | 11-14           |
| <b>Series</b>                            | DETH            |

## INDUSTRY ACCREDITATIONS

