


1012810002

2 Pole glass-fibre reinforced polyamide through hole insert pillar terminal block 8 mm pitch 24a 450v

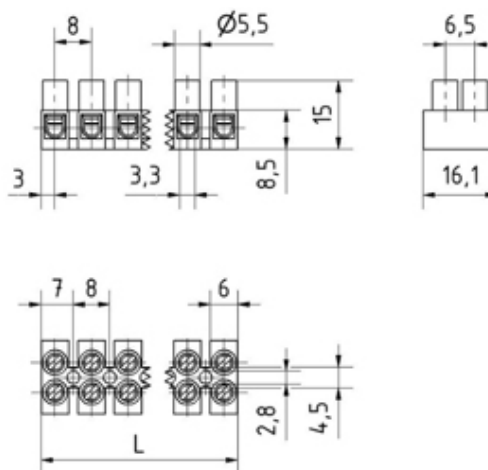

SPECIFICATION

Number of Poles	2
Terminal Material	Zinc-plated steel
Terminal Type	Through hole
Body Material	Polyamide, glass fibre reinforced
Colour	White
Glow Wire Resistance Test Temp	750 C Flame < 2 Sec (IEC/EN60335-1)
Base Type	Standard
Min Conductor Size (Sq mm)	0.5
Max Conductor Size (Sq mm)	2.5
Max Current (A)	24
Max Voltage (V)	450
Working Temperature	T150
Pitch (mm)	8
Length (mm)	14
Comments	1) Assembly-bore : Diameter 2.8 mm , 2) Photo is just a representative of terminal block, see line drawing
Terminal Screw Material	M 3 nickel-plated steel
Tracking Resistance CTI (v)	425
Wire Protection Material	Chrome-nickel-steel