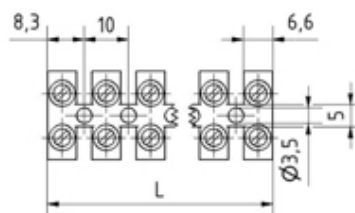
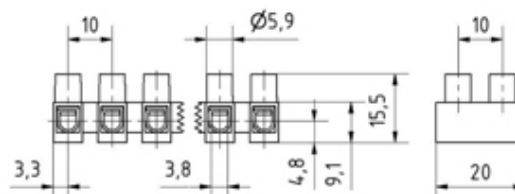


1012913003

3 Pole glass-fibre reinforced polyamide barrier with wire protection insert pillar terminal block 10 mm pitch 32a 450v


SPECIFICATION

Number of Poles	3
Terminal Type	Barrier with wire protection
Body Material	Polyamide, glass fibre reinforced
Colour	White
Glow Wire Resistance Test Temp	750 C Flame < 2 Sec (IEC/EN60335-1)
Base Type	Standard
Min Conductor Size (Sq mm)	0.75
Max Conductor Size (Sq mm)	4
Max Current (A)	32
Max Voltage (V)	450
Working Temperature	T150
Pitch (mm)	10
Length (mm)	26.6
Comments	1) Assembly-bore : Diameter 3.5 mm , 2) Photo is just a representative of terminal block, see line drawing
Terminal Screw Material	M 3 nickel-plated steel
Tracking Resistance CTI (v)	425
Wire Protection Material	Chrome-nickel-steel