


### 50.650 MFK1

Perfect cable gland with flat cable sealing insert M50X1,5 thread length 9, min/max cable dia -4x24

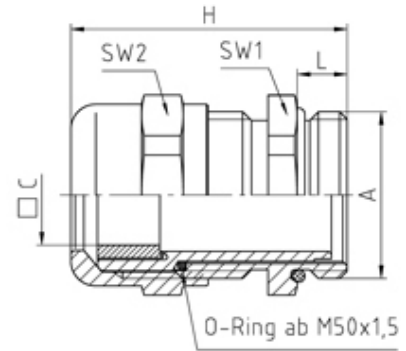

### SPECIFICATION

<b>Product Type</b>	Standard
<b>Body Material</b>	Nickel Plated Brass
<b>Min Temperature °C</b>	-20
<b>Max Temperature °C</b>	100
<b>IP Rating</b>	66
<b>Thread Size</b>	M50
<b>Clamping Range Max (mm)</b>	4x24
<b>Lamellar Insert Material</b>	Polyamide PA6 V-2
<b>External Connecting Thread Type</b>	Metric
<b>Thread Length (mm)</b>	9
<b>Sealing Insert</b>	Evoprene TPE
<b>Comments</b>	sealing inserts - see WJ-DM xxFK1
<b>Width Across Flat 1 (mm)</b>	55
<b>Width Across Flat 2 (mm)</b>	55
<b>Height (mm)</b>	49.5
<b>Connecting Thread Size</b>	M50x1.5
<b>Additional Material Detail</b>	Body - Brass CuZn39Pb3 nickel plated, O-Ring - Nitrile rubber