


## FV110

3 Pole screw to tab terminal block

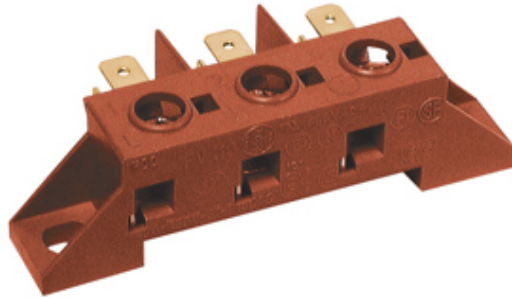

### SPECIFICATION

|                            |                                   |
|----------------------------|-----------------------------------|
| Number of Poles            | 3                                 |
| Tabs Per Pole              | 3                                 |
| Tab Size (mm)              | 6.3x0.8                           |
| Terminal Material          | Zinc-plated steel                 |
| Body Material              | Polyamide, glass fibre reinforced |
| UL94 Rating                | UL94V0                            |
| Max Conductor Size (Sq mm) | 6                                 |
| Min Conductor Size AWG     | 22                                |
| Max Conductor Size AWG     | 8                                 |
| Max Current (A)            | 40                                |
| Max Voltage (V)            | 450                               |
| Minimum Temp Rating °C     | -5                                |
| Max Temp Rating °C         | 150                               |
| Pitch (mm)                 | 17.7                              |
| Height (mm)                | 24                                |
| Width (mm)                 | 31.5                              |
| Length (mm)                | 81.3                              |
| Accessories Available      | PA269                             |

### DISTRIBUTORS

