


Palm/Foot Switches

Range: Control Stations

Order Code: SFP-EAM-1A1B-RD/HYL01 (1DE.SP.21NR)

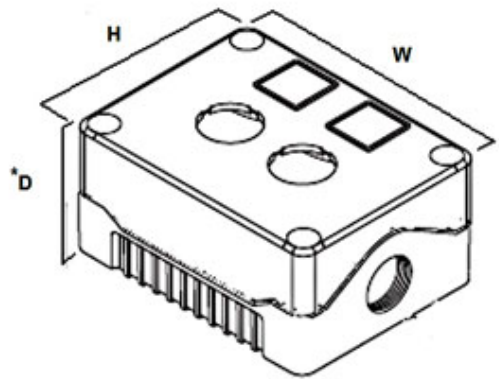

*Enclosure only except 1DE .SP series where D includes actuator height

DESCRIPTION

Palm/foot switch red button. Push to stop/start - release to reset

*Subject to technical modification without notice.
Typographical and other errors do not justify claim for damages.*

CONTROL STATIONS FEATURES

- Customised control station service available - please ask for details.
- Insulation resistance - >100M Ω @ 500VDC
- Enclosures sealed up to IP66
- Dust & waterproof for short-term submersion
- 4 sizes available! Accepting 1-4 push button switches
- 2 contact blocks fitted as standard
- Different voltage ratings are available
- Contact material - Silver Bifurcated and serrated
- Operating Temperature -10 to +65°C
- Contact rating - AC12 Resistive / AC15 Electromagnetic - 240V (3A) / 415V (1.5A)
- Mechanical life - 1 million operations

Features may vary by product throughout the range.

SPECIFICATION

Base Colour	Black
Base Style	Standard base
Depth (mm)	102.5
Enclosure Material	ABS-UL94-HB
Height (mm)	85
IP Rating	IP66
Lid Colour	Grey
Min Temperature Rating °C	-10
Max Temperature Rating °C	65
Number of Switches	1
Size (mm)	85x69x102.5
Switch 1 Style	Pushbutton non-illuminated
Switch 1 Substyle	Palm/foot
Width (mm)	69