
hylec

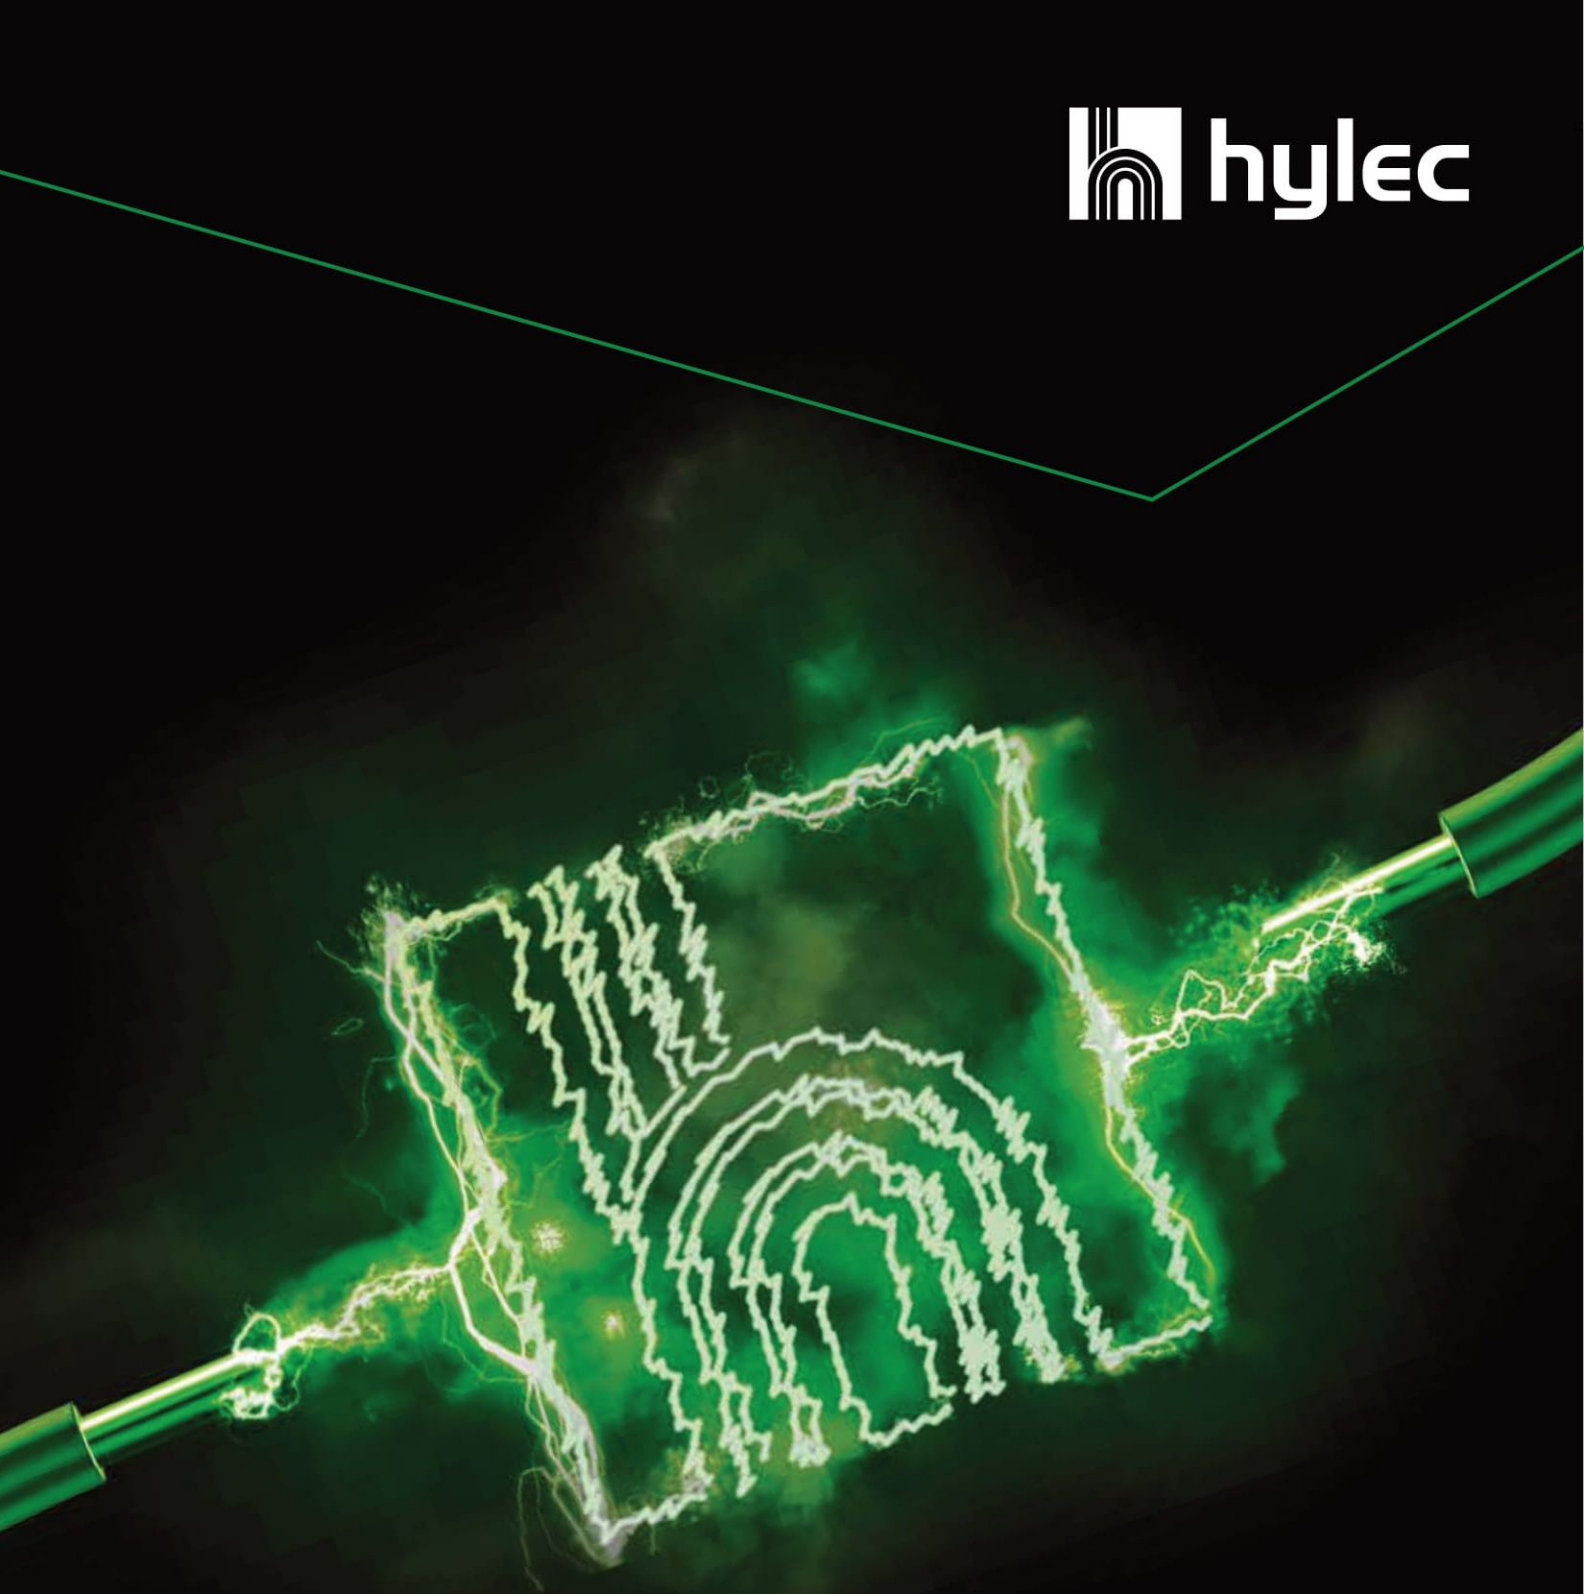

WHOLESALE CATALOGUE

2026 ISSUE 1

- Debox®
- Enclosures
- GRP Enclosures
- Cable Glands
- Weatherproof Connectors
- Motor Control Gear
- High Temperature Connectors
- Neutral Blocks
- Solar Power Control & Connection
- Switches

DEBOX® Junction Boxes

Save time and money with DEBOX in-line Junction Boxes

debox S





The First Debox – Millions sold worldwide

EJB-DBS-10-05-03-WW
24A 4 Pole Terminal Block
Size: 97 x 50 x 28.5mm
Trade Price £1.15

EKT-DBX-10-05-03-WW
CDU containing 72 Pieces
Trade Price £82.80

Bulk Pieces-400
Trade Price £460.00

---

debox SM40





The Micro Debox, fits through a 40mm aperture

EJB-DBX-08-03-04-WW
24A 4 Pole Terminal Block
Size: 80 x 35 x 25mm
Trade Price £1.29

EKT-DBX-08-03-04-WW
CDU containing 72 Pieces
Trade Price £ 92.88

Bulk Pieces-400
Trade Price £516.00

---

debox SL





The Screw-Free and Maintenance-Free Debox

EJB-DBX-10-03-05-WW
16A 4 Pole Terminal Block
Size: 97 x 50 x 28.5mm
Trade Price £2.06

EKT-DBX-10-03-05-WW
CDU containing 72 Pieces
Trade Price £148.32

Bulk Pieces-400
Trade Price £824.00

IP66 Rating includes protection against powerful water jets/ heavy seas.

IP67 Adds protection against temporary submersion in water.

debox SL2





The 5-Way Debox supplied with 5 x 3-way lever connectors

- Unique, cable strain relief
- Maintenance-Free

EJB-DBX-11-04-05-WW
Size: 107 x 47 x 35mm
Trade Price £2.42

EKT-DBX-11-04-05-WW
CDU containing 54 Pieces
Trade Price £130.68

Bulk Pieces-240
Trade Price £580.80

---

debox V





The Debox enclosure for use with your own connectors

- Supplied without connectors
- Housing for 5 x 221 connectors

EJB-DBV-11-04-05-WW
Size: 107 x 47 x 35mm
Trade Price £1.38

EKT-DBV-11-04-05-WW
CDU containing 54 Pieces
Trade Price £74.52

Bulk Pieces-240
Trade Price £331.20

---

debox 11





The Outdoor Debox

- Supplied with 5 x 3-way, 32A connectors
- For internal/external use
- 10 Cable entry points
- Membrane piercing entry points, IP66
- Threaded inserts for cable glands, IP67

EJB-DBX-09-06-09-BB
Size: 85 x 85 x 53mm
Trade Price £4.95

EKT-DBX-09-06-09-BB
CDU containing 24 Pieces
Trade Price £118.80

Bulk Pieces-76
Trade Price £376.20

Electrical Enclosures

Robust enclosures, manufactured with flame-retardant ABS, steel or stainless steel



IP66

DN range – ABS screw-lid enclosures

- Captive non-rust, plastic screws
- High impact to IK08
- 35mm DIN rail section included
- Solid or transparent lids

Grey Lid (RAL 7035)	Trade Price	Transparent Lid	Trade Price	HxWxD
ELE-ABS-13-08-13-GG	£12.48	ELE-ABS-13-08-13-GT	£14.64	125 x 125 x 75mm
ELE-ABS-13-10-13-GG	£13.63	ELE-ABS-13-10-13-GT	£16.06	125 x 125 x 100mm
ELE-ABS-13-08-18-GG	£15.29	ELE-ABS-13-08-18-GT	£18.00	175 x 125 x 75mm
ELE-ABS-13-10-18-GG	£16.85	ELE-ABS-13-10-18-GT	£19.86	175 x 125 x 100mm
ELE-ABS-13-13-18-GG	£18.76	ELE-ABS-13-13-18-GT	£22.07	175 x 125 x 125mm
ELE-ABS-13-15-18-GG	£20.54	ELE-ABS-13-15-18-GT	£24.60	175 x 125 x 150mm

IP65



DED range – ABS door enclosures

- With galvanised mounting plate
- High impact to IK08
- Locks and keys supplied
- Solid or transparent doors

Grey Door (RAL 7035)	Trade Price	Transparent Door	Trade Price	HxWxD
EDE-PLA-018-024-013-GLX	£48.88	EDE-PLA-018-024-013-GTX	£68.77	240 x 180 x 130mm
EDE-PLA-020-030-013-GLX	£56.21	EDE-PLA-020-030-013-GTX	£70.43	300 x 200 x 130mm
EDE-PLA-025-035-015-GLX	£63.84	EDE-PLA-025-035-015-GTX	£81.59	350 x 250 x 150mm
EDE-PLA-030-040-017-GLX	£81.86	EDE-PLA-030-040-017-GTX	£105.12	400 x 300 x 170mm
EDE-PLA-030-040-022-GLX	£97.08	EDE-PLA-030-040-022-GTX	£116.28	400 x 300 x 220mm
EDE-PLA-035-050-019-GLX	£119.98	EDE-PLA-035-050-019-GTX	£143.83	500 x 350 x 190mm
EDE-PLA-040-050-024-GLX	£136.26	EDE-PLA-040-050-024-GTX	£165.05	500 x 400 x 240mm
EDE-PLA-040-060-020-GLX	£136.24	EDE-PLA-040-060-020-GTX	£165.07	600 x 400 x 200mm
EDE-PLA-060-080-026-GLX	£167.84	EDE-PLA-060-080-026-GTX	£196.92	800 x 600 x 260mm
EDE-PLA-050-070-025-GLX	£312.77	EDE-PLA-050-070-025-GTX	£412.36	700 x 500 x 250mm
EDE-PLA-040-050-018-GLX	£119.97	EDE-PLA-040-050-018-GTX	£143.83	500 x 400 x 180mm
EDE-PLA-060-080-026-GLX	£414.22	EDE-PLA-060-080-026-GTX	£507.01	800 x 600 x 260mm

IP65 Rating includes protection from water jets from any direction .

IP66 Rating includes protection against powerful water jets/ heavy seas.



DEDS range – Steel door enclosures

Code	HxWxD	Trade Price
EDE-STE-020-025-013-GL	250 x 200 x 130mm	£45.74
EDE-STE-020-030-013-GL	300 x 200 x 130mm	£59.00
EDE-STE-030-030-015-GL	300 x 300 x 150mm	£78.29
EDE-STE-025-035-015-GL	350 x 250 x 150mm	£77.77
EDE-STE-040-050-018-GL	500 x 400 x 175mm	£161.34
EDE-STE-030-040-017-GL	400 x 300 x 170mm	£104.34
EDE-STE-030-040-022-GL	400 x 300 x 220mm	£115.37
EDE-STE-040-040-020-GL	400 x 400 x 200mm	£126.48
EDE-STE-035-050-019-GL	500 x 350 x 190mm	£149.53
EDE-STE-040-050-020-GL	500 x 400 x 200mm	£151.31

IP66

DEDS range – Galvanised steel door enclosures

- Galvanised steel wall mounting plate and brackets
- Spacers for the back plate
- Wired and fitted earthing strap
- High impact to IK10
- Metal locks and keys
- Guaranteed for 3 years against corrosion

Code	HxWxD	Trade Price
EDE-STE-040-050-024-GL	500 x 400 x 240mm	£172.75
EDE-STE-050-050-020-GL	500 x 500 x 200mm	£163.64
EDE-STE-040-060-020-GL	600 x 400 x 200mm	£181.94
EDE-STE-040-060-025-GL	600 x 400 x 250mm	£187.69
EDE-STE-060-060-020-GL	600 x 600 x 200mm	£218.17
EDE-STE-040-080-020-GL	800 x 400 x 200mm	£236.42
EDE-STE-050-070-025-GL	700 x 500 x 250mm	£270.88
EDE-STE-060-080-026-GL	800 x 600 x 260mm	£341.60
EDE-STE-060-100-030-GL	1000 x 600 x 300mm	£445.02
EDE-STE-060-125-030-GL	1250 x 600 x 300mm	£539.56



IP66

DEDSS range – Stainless steel door enclosures

- Grade 304 stainless steel construction with galvanised steel wall mounting plate and brackets
- Spacers for the back plate
- Wired and fitted earthing strap
- High impact to IK10
- Metal locks and keys
- Guaranteed for 3 years against corrosion

Code	HxWxD	Trade Price
EDE-SLS-020-030-015-GL	300 x 200 x 150mm	£171.14
EDE-SLS-030-030-015-GL	300 x 300 x 150mm	£233.37
EDE-SLS-030-040-020-GL	400 x 300 x 200mm	£331.85
EDE-SLS-040-040-020-GL	400 x 400 x 200mm	£414.79
EDE-SLS-040-050-020-GL	500 x 400 x 200mm	£497.80
EDE-SLS-050-050-020-GL	500 x 500 x 200mm	£593.40

Electrical Enclosures

Glass reinforced polyester (GRP) enclosures

Hylec's Glass Reinforced Polyester (GRP) enclosures are lightweight, strong and versatile. They also resist corrosion and temperature extremes.

Each enclosure comes with a GRP backplate, 304 stainless steel wall mounting plates, Hy-Tech weatherproof coating (with a 25-year guarantee) and utility locks and keys.

- GRP construction, flame retardant to UL94 V0
- Superior weather protective coating
- Operating temp -50° to +200°
- Hidden, stainless steel hinges
- Rated IP66, IK10
- Locks and key supplied
- Flush mounted, PC window options



Code	Dimensions (HxWxD)	Trade Price
EDE-GRP-025-035-020-GL	350 x 250 x 200	£84.00
EDE-GRP-030-040-020-GL	400 x 300 x 200	£112.00
EDE-GRP-030-040-027-GL	400 x 300 x 273	£126.00
EDE-GRP-035-050-020-GL	500 x 350 x 200	£154.00
EDE-GRP-040-060-020-GL	600 x 400 x 200	£189.00
EDE-GRP-040-060-025-GL	600 x 400 x 250	£196.00
EDE-GRP-050-070-024-GL	700 x 500 x 246	£224.00

Cable Glands


Quality cable glands for today's Professionals

Kwik-Fix cable glands

Saves time and money when space is tight. Rapid IP68 installation. Pack of 5 x nylon glands, no locknuts required.



Grey (RAL7035)	Black (RAL9005)	Thread Size	CABLE Ø	Pack Qty	Trade Price
GCG-QKK-M16-GL/PK5	GCG-QKK-M16-BK/PK5	M16	5-10mm	5	£7.21
GCG-QKK-M20-GL/PK5	GCG-QKK-M20-BK/PK5	M20	8-13mm	5	£7.91
GCG-QKK-M25-GL/PK5	GCG-QKK-M25-BK/PK5	M25	11-17mm	5	£8.88

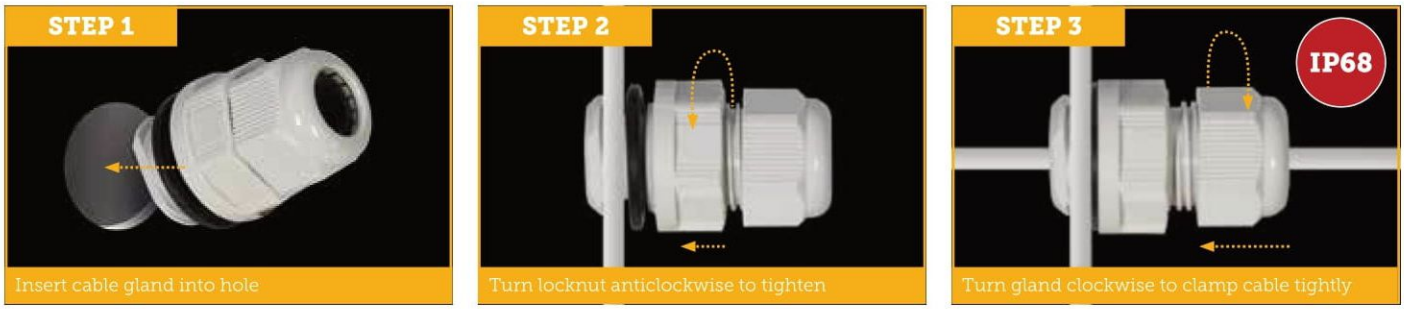



IP68

Nylon cable glands

IP68 rated cable glands in black or grey, with locknuts. Pack of 10

- Temp range -20°c to +100°c
- Quick and easy installation without special tools
- Wall thickness 1-4mm

Grey (RAL7035)	Black (RAL9005)	Thread Size	CABLE Ø	Pack Qty	Trade Price
GCG-NMK-M16-GL/PK10	GCG-NMK-M16-BK/PK10	M16	5-10mm	10	£8.45
GCG-NMK-M20-GL/PK10	GCG-NMK-M20-BK/PK10	M20	8-13mm	10	£8.77
GCG-NMK-M25-GL/PK10	GCG-NMK-M25-BK/PK10	M25	11-17mm	10	£13.06



IP68

Nickel plated brass cable glands

IP68 nickel-plated brass cable glands with locknuts

Code	Description	CABLE Ø	Pack Qty	Trade Price
GGCG-BML-M16-NP-PK5	M16 long thread gland and locknuts	5-9mm	5	£33.13
GCG-BML-M20-NP-PK5	M20 long thread gland and locknuts	9-13mm	5	£34.96

IP66

IP68

IP69K



Venting elements

Protect enclosures from excessive pressure due to internal/external temperature fluctuations. Manufactured from flame retardant PA6, pack of 5, or stainless steel, single pack.

Code	Description	Pack Qty	Trade Price
GVE-PML-M12-GL-PK5	Grey (RAL7035) M12 mounting	5	£18.74
GVE-PML-M20-GL-PK5	Grey (RAL7035) M20 mounting	5	£52.78
GVE-SMS-M12-SS	Stainless steel M12 mounting	1	£17.47

Weatherproof Connectors

High performance Weatherproof electrical connectors



1.

2.

IP68

2 cable entry connectors

- 2 cable entry, in-line connectors
- Max current 32A
- Max conductor size 4mm
- Cable ranges between 5-17mm
- IP68 Rated

1. CWP-TIK-BDS-O03-K1, 3 poles, £13.82
CWP-TIK-CDS-G05, 5 poles, £18.08
2. CWP-TIK-BDS-O03, 3 poles, £12.40

NEW!

Ultra-Micro 2-Pole cable Connector

CWP-TIU-AAS-A02, 2 poles, £9.16





Only 76mm long x 14mm wide!



1.



2.

IP68

3 cable entry connectors

- 3 Cable entry, "T" & "Y" style
- Power splitter connectors
- Max conductor size of 4mm
- Max current 32A
- Cable ranges between 7-17mm
- IP68 rated

1. CWP-TTZ-BCS-O03, Short "T" Style, 3 poles, £12.19
2. CWP-TYG-BCS-O03, Short "Y" style, 3 poles, £19.14

IP68 — Full protection against dust and other particulates, including a vacuum seal, tested against continuous airflow. Protection against extended immersion under higher pressure i.e. greater depths.

IP69K — Adds - Protection against high-pressure, high-temperature jet sprays, wash-downs or steam-cleaning procedures



IP68

Plug & socket kits

- Plugs and sockets or plug/socket kits
- Max current (1) 32A, (2) 17A
- Max conductor size of 4mm
- Cable ranges between 7-12mm
- IP68 rated

1. **CWP-PBS-AD-S03O 3 pole Socket, £13.64 and CWP-PBK-AD-S03O matching 3 pole Plug with locking safety ring, £28.76**

2. **CWP-PTS-SCD-S03B, 3 pole Socket, £11.49 and CWP-PTP-SCD-S03B, matching 3 pole Plug, £10.98**



IP68 IP69K

Micro plug & socket kits

- Only 14mm diameter
- 2 or 3 poles capacity
- Max conductor size of 4mm
- Cable ranges between 5.8-6.9mm
- IP68 and IP69K rated

CWP-PMS-DB-P03O, 3 pole Micro Socket, £11.12 and CWP-PMP-DB-P03O, matching 3 pole Micro Plug, £11.12



IP68

Gel filled connectors

- Patented memory Gel
- Can be rewired without renewal of internal Gel
- Supplied complete with connector
- Ideal for external connection applications
- Can be buried without moisture ingress
- Up to 16 Amp current capability

1. **CGL-I4A-S03, 3 poles, £19.99**
2. **CGL-I2C-O02, 2-Poles, £11.05**
3. **CGL-J2B-S03, 3 poles. £16.31**

Connectors

High temperature connectors and neutral blocks



Features

- **Non-flammable**
- **Temperature resistant up to 1,000°c**
- **Continuous operating temperature >350°c**

CERAMIC TERMINAL BLOCKS

Steatite connectors, VDE approved, rated up to 1,000°C.

Ideal for high temperature applications such as boilers, water heaters, cookers and injection moulding machines

Code	Description	Pack QTY	Trade Price	Equivalent Unit Price
CTB-CMA-11.00I-01WE-PK5	1P 32A 2.5mm²	5	£2.80	£0.56
CTB-CMA-11.00I-02WE-PK5	2P 32A 2.5mm²	5	£4.58	£0.92
CTB-CMA-11.00I-03WE-PK5	3P 32A 2.5mm²	5	£7.18	£1.44
CTB-CMA-11.00I-04WE-PK5	4P 32A 2.5mm²	5	£8.81	£1.76
CTB-CMW-14.00I-01WE-PK5	1P 41A 4mm²	5	£4.72	£0.94
CTB-CMA-14.00I-02WE-PK5	2P 41A 4mm²	5	£7.58	£1.52
CTB-CMA-14.00I-03WE-PK5	3P 41A 4mm²	5	£10.43	£2.09
CTB-CMA-14.00I-04WE-PK5	4P 41A 4mm²	5	£14.55	£2.91
CTB-CMA-18.50I-02WE-PK5	2P 57A 10 mm²	5	£10.30	£2.06
CTB-CMA-18.501-03WE-PK5	3P 57A 10 mm²	5	£14.29	£2.86





100A NEUTRAL BLOCKS

A 5-way neutral block is an electrical connector block used to connect multiple wires, typically for safety and convenience.

- **Easy Identification and connection of Neutral Wires**
- **High-conductivity, brass construction**
- **Terminal Clamps and Locking Screw both use 4mm Allen Key**
- **Colour coded, 6 colours available**
- **Rated up to 100A**
- **Dimensions: 70x42.5xD42.5mm**

Product Code	Pack Qty	Colour	Pack Price	Unit Equivalent
CNB-100A-BK –PK5	5	Black RAL9005	£25.00	£5.00
CNB-100A-LG-PK5	5	Light Grey RAL7035	£25.00	£5.00
CNB-100A-GN-PK5	5	Green RAL6037	£25.00	£5.00
CNB-100A-BE-PK5	5	Blue RAL5015	£25.00	£5.00
CNB-100A-BN-PK5	5	Brown RAL8011	£25.00	£5.00
CNB-100A-PK-PK5	5	Pink RAL4010	£25.00	£5.00

Motor Control Gear

Fundamental components for ensuring the reliable and safe operation of electric motors



Direct online starter (DOL)[1]

- CE Approved
- Supplied with wall/panel facility Mounting screw
- Suitable for most applications including woodworking, dust collecting and metal recycling machinery
- Simple to use
- IP65 water ingress protected
- Complete with threaded cable gland entry
- Wired ready for use with thermal overload relay. (See attached table)

Code	Trade Price
TSM-DEA-11D-240V	£48.24
TSM-DEA-12D-240V	£53.99
TSM-DEA-18D-240V	£64.90



Thermal overload relays[2]

Typically paired with DOL starters. They sense excessive current by monitoring the motor's temperature rise and interrupt the circuit if unsafe conditions persist offering an essential layer of protection, preventing overheating and extending the motor's operational life.

Code	Trade Price
TSM-TPN-01400	£27.29
TSM-TPN-01700	£27.29
TSM-TPN-02500	£28.94



Pole Contactor[3]

Plays a crucial role in a Direct-On-Line (DOL) starter system, working alongside a thermal overload relay to control and protect electric motors.

Code	Trade Price
TCR-CAC-1AB0B-25A-240V	£27.29
TCR-CAD-1AB0B-25A-240V	£27.29
TCR-CAE-1AB0B-25A-240V	£28.94

Product Compatibility

1. DOL Starter	TSM-DEA-11D	TSM-DEA-12D	TSM-DEA/18D
Load	5.5Kw	7.5w	10Kw
Coil Voltage	240V	240V	240V
2. Thermal Overload Relay	**TSM-TPN-01400**	**TSM-TPN-01700**	**TSM-TPN-02500**
Relay Setting Range RC (FLC) A	1-14	14-17	21-25
3. Pole Contactor	TCR-CAC-10AB-25A-240V TCR-CAD-10AB-25A-240V	TCR-CAD-10AB-25A-240V	TCR-CAE-10AB-25A-240V

Hylec solar

PV Connection and Control

Solar MC4 Connectors

- **99.98% Pure copper core, minimises power loss**
- **Halogen free XPLO insulation and virgin pvc sheathing maximises protection from the elements**
- **High current/voltage capacity**
- **Flame-retardant to UV94 V-0**
- **Highly resistant to high and low temperatures, water, ultraviolet light, oxidation, rust and corrosion**



Multi-Use Solar PV Spanners
CPV-TOL-KCB
Trade Price £1.56



1,000 Volt Solar PV Connectors
CPV-KC4-1T1-I
Cable sizes 2.5,4 & 6mm²
Trade Price £1.95



1,500 Volt Solar PV Connectors
CPV-KC5-1T1-I
Cable sizes 2.5,4 & 6mm²
Trade Price £1.99



1,500 Volt Solar PV Connectors
CPV-KC6-1T1-I
Cable sizes 4.6 & 10mm²
Trade Price £3.12

Extension Cables

- **With CPV-KC5-1T1-I Connectors**
- **Preconnected extension cables – Save time and money**
- **DC-DC 1,500V, 30A**



Black cable



Supplied with spanner to release NEC interlock connectors




2 to 1 "Y" Branch Connectors

Black Pair
- A pair of 2 to 1, "Y" style cables,
- 2 male to 1 female &
- 2 female to 1 male connectors

Cable Length Metres	Product Code	Cable Colour	Trade Price
Cable Diameter 4mm²			
2M	CPV-BE5-1T1-A02	Black	£6.49
3M	CPV-BE5-1T1-A03	Black	£8.42
5M	CPV-BE5-1T1-A05	Black	£11.81
10M	CPV-BE5-1T1-A10	Black	£20.57
Cable Diameter 6mm²			
2M	CPV-BE5-1T1-B02	Black	£7.90
3M	CPV-BE5-1T1-B03	Black	£10.73
5M	CPV-BE5-1T1-B05	Black	£15.69
10M	CPV-BE5-1T1-B10	Black	£28.30
Cable Diameter 6mm²: 2 to 1 "Y" Branch Connectors			
3.6M x 2	CPV-JW5-2T1-Y	Black and black	£9.29





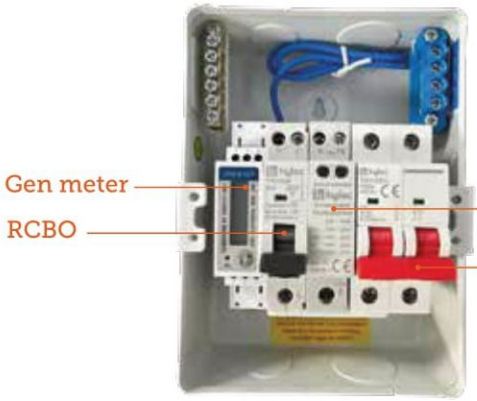

PV Control Units

A pre-connected, metal constructed Control Unit.

Includes a Main Switch, an RCBO to protect circuits and equipment from overcurrent and earth faults, a Surge Protection Device to respond to overvoltage events and a bi-directional Gen Meter to record the energy created and/or sent to a grid, which is also MID approved.

Code	Description	Trade Price
TPV-5KA-16A-GS	CONTROL PV 5 WAY KIT - 16AMP RCBO	£85.00
TPV-5KA-20A-GS	CONTROL PV 5 WAY KIT - 20AMP RCBO	£85.00
TPV-5KA-25A-GS	CONTROL PV 5 WAY KIT - 25AMP RCBO	£85.00
TPV-5KA-32A-GS	CONTROL PV 5 WAY KIT - 32AMP RCBO	£85.00
TPV-5KA-40A-GS	CONTROL PV 5 WAY KIT - 40AMP RCBO	£85.00

Combiner Boxes

Constructed with robust IP65-rated Polycarbonate enclosures, Hylec Combiner boxes guard against dust, water ingress, and UV exposure. With an IK08 impact resistance rating, they're ideal for demanding outdoor environments

Designed for efficiency and safety, Hylec's pre-connected Combiner Boxes consolidate multiple solar panel strings into a single output—reducing wiring complexity and enabling smoother integration with inverters.



Product shown, 4-In, 1-Out

2-In, 1-Out Combiner Box
TCB-WKA-2I1O-1000V
Trade Price £222.00

4-In, 1-Out Combiner Box
TCB-WKA-4I1O-1000V
Trade Price £320.00

2-In, 2-Out Combiner Box
TCB-WKA-2I2O-1000V
Trade Price £316.40

4-In, 2-Out Combiner Box
TCB-WKA-4I2O-1000V
Trade Price £381.24

Switches

Rotary Isolators with substantial interior space

Features

- AC & DC range
- Flame retardant UL94V-0
- 4-Pole + earth terminal included
- Large housing - superior cable management
- TUV & UL approved
- Captive retained cover screws
- Can be padlocked (padlock not included)
- Best price performance on UK market

IP66



AC Small



DC Large



AC Large

Rotary isolators AC range

Code	Description	Trade Price
SRI-EAA-20A-GY	IP66 rated AC Rotary Isolator Switch. 20A	£13.97
SRI-EAA-25A-GY	IP66 rated AC Rotary Isolator Switch. 25A	£14.03
SRI-EAA-32A-GY	IP66 rated AC Rotary Isolator Switch. 32A	£16.41
SRI-EAA-40A-GY	IP66 rated AC Rotary Isolator Switch. 40A	£17.83
SRI-EAA-63A-GY	IP66 rated AC Rotary Isolator Switch. 63A	£25.27
SRI-EAA-80A-GY	IP66 rated AC Rotary Isolator Switch. 80A	£33.74

Rotary isolators DC range

Code	Description	Trade Price
SRI-EDA-16A-GG	IP66 rated DC Rotary Isolator Switch. 16A	£38.99
SRI-EDA-25A-GG	IP66 rated DC Rotary Isolator Switch. 25A	£39.14
SRI-EDA-32A-GG	IP66 rated DC Rotary Isolator Switch. 32A	£39.99



AC DIN Rail Mounted Isolator



DC DIN Rail Mounted Isolator

DIN rail rotary isolators

Code	Description	Trade Price
SRI-DDA-32A-1200-04	DIN Rail DC Rotary Isolator Switch. 32A	31.54
SRI-DAA-30A-800-04	DIN Rail AC Rotary Isolator Switch. 32A	£17.70

2-Way Mod Box with 100A mains switch

A 100 Amp Main Switch/Isolator Switch, housed in a wall-mounted DIN Rail Enclosure.

TMB-2KA-100A-MSA
Trade Price £13.00

Features

- Standard: IEC60947-3
- Rated current: 25~125A
- Rated voltage: 400/415V Utilization category: AC-22A
- Degree of protection: IP20
- Two Cable entries, top and bottom
- Certificates: CB, CE, UKCA









NEW PRODUCT

Latching palm/foot switch, Red Button. Push to stop/start - twist to reset



Emergency stop stations

Controls with a variety of stop/start, key-lock, buttons and switches.

Code	Description	Trade Price
SCS-PSE-BY-RXX	Twist to release emergency stop	£25.44
SCS-PSK-BY-RXX	Emergency stop, key reset	£26.63
SFP-EAL-2A1B-RD	Latching Palm/foot switch red button	£48.54

Momentary/Door Entry switches

Hand/Foot switches, activate while being pressed

Code	Description	Trade Price
SFP-EAM-1A1B-RD	Palm/foot switch red button	£48.54
SFP-EAM-1A1B-GN	Palm/foot switch green button	£48.54
SFP-EAM-1A1B-BK	Palm/foot switch black button	£48.54



Control stations

Code	Description	Trade Price
SCS-PSP-BG-RXX	Single stop push-button stations, grey cover, black base, red flush push-button	£16.59
SCS-PSP-BG-GXX	Single start push-button stations, grey cover, black base, green flush push-button	£16.41
SCS-PSS-BG-BXX	2-position selector, grey cover, black base	£17.98
SCS-PSR-BG-BXX	Key 2-position selector, grey cover, black base	£28.15

MAKING THE RIGHT CONNECTIONS

WWW.HYLEC-APL.COM | SALES@HYLEC-APL.COM | 01933 234400

RPM-CAT-WSE-B001