


# Nylon PG Cable Glands

## Range: Cable Glands/Grommets

Order Code: GCG-NPS-PG29-BK (50.029 PA/SW)

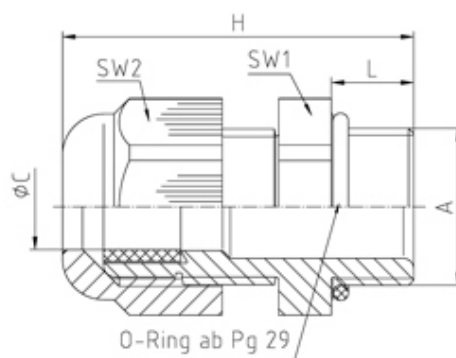

### DESCRIPTION

Perfect cable gland PA/SW PG29 thread length 11, min/max cable dia 18-25

### CABLE GLANDS/GROMMETS FEATURES

- PG Nylon
- Easy to install
- 50.0xx range offers protection against twisting and also offers integrated anchorage
- Temperature rating -20°C to +100°C

*Subject to technical modification without notice.*

*Typographical and other errors do not justify claim for damages.*

## SPECIFICATION

|                                 |  |
|---------------------------------|--|
| Product Type                    | Standard                               |
| Sealing Ring Material           | Polychloroprene-Nitrile rubber CR/NBR  |
| Body Material                   | Polyamide                              |
| Min Temperature Rating °C       | -20                                    |
| Max Temperature Rating °C       | 100                                    |
| IP Rating                       | 68                                     |
| Colour                          | Black - RAL 9005                       |
| Thread Size                     | PG29                                   |
| Clamping Range Min (mm)         | 18                                     |
| Clamping Range Max (mm)         | 25                                     |
| External Connecting Thread Type | PG                                     |
| Thread Length (mm)              | 11                                     |
| Comments                        | details about test standards see annex |
| Width Across Flat 1 (mm)        | 42                                     |
| Width Across Flat 2 (mm)        | 42                                     |
| Height (mm)                     | 53                                     |
| Connecting Thread Size          | Pg 29                                  |
| Additional Material Detail      | Body - Polyamide PA6 V-2               |
| Standards                       | UL514B                                 |
| Test Standard                   | UL 514B                                |

## INDUSTRY ACCREDITATIONS

