


# Nylon PG Cable Glands

## Range: Cable Glands/Grommets

Part Number: 50.021 PA/BS

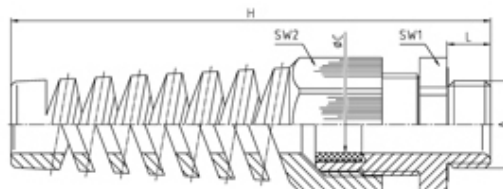

### DESCRIPTION

Perfect cable gland with spiral top PA7001 PG21 thread length 11, min/max cable dia 13-18

### CABLE GLANDS/GROMMETS FEATURES

- PG Nylon
- Easy to install
- 50.0xx range offers protection against twisting and also offers integrated anchorage
- Temperature rating -20°C to +100°C

*Subject to technical modification without notice.*

*Typographical and other errors do not justify claim for damages.*

## SPECIFICATION

|  |  |
|--|--|
| <b>Product Type</b>                    | Standard                               |
| <b>Sealing Ring Material</b>           | Polychloroprene-Nitrile rubber CR/NBR  |
| <b>Body Material</b>                   | Polyamide                              |
| <b>Min Temperature Rating °C</b>       | -20                                    |
| <b>Max Temperature Rating °C</b>       | 100                                    |
| <b>IP Rating</b>                       | 68                                     |
| <b>Colour</b>                          | Dark Grey - RAL 7001                   |
| <b>Thread Size</b>                     | PG21                                   |
| <b>Clamping Range Min (mm)</b>         | 13                                     |
| <b>Clamping Range Max (mm)</b>         | 18                                     |
| <b>External Connecting Thread Type</b> | PG                                     |
| <b>Thread Length (mm)</b>              | 11                                     |
| <b>Comments</b>                        | details about test standards see annex |
| <b>Width Across Flat 1 (mm)</b>        | 33                                     |
| <b>Width Across Flat 2 (mm)</b>        | 33                                     |
| <b>Height (mm)</b>                     | 130                                    |
| <b>Connecting Thread Size</b>          | Pg 21                                  |
| <b>Additional Material Detail</b>      | Body - Polyamide PA6 V-2               |
| <b>Standards</b>                       | UL514B                                 |
| <b>Test Standard</b>                   | UL 514B                                |

## INDUSTRY ACCREDITATIONS

