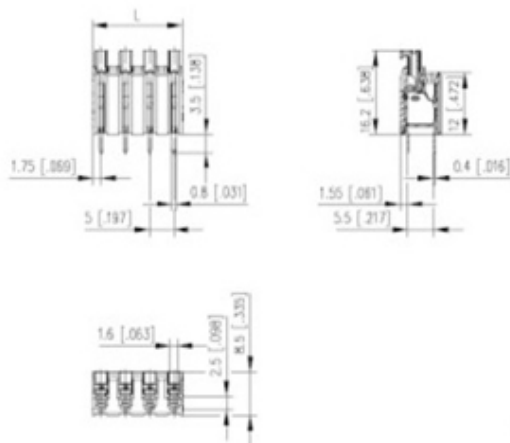


SR21512VBPC

12 Pole vertical spring PCB terminal block 5mm pitch 17.5A 250V


SPECIFICATION

| | |
|-----------------------------|---|
| Type | Spring - Screwless |
| Connection Method | Pushbutton |
| Mounting Type | Wave - through hole |
| Orientation | Vertical |
| Join | Solid body non stackable |
| Pitch (mm) | 5 |
| Number of Poles | 12 |
| Min Wire Size (Sq mm) | 0.08 |
| Max Wire Size (Sq mm) | 1.5 |
| Max Current (A) | 17.5 |
| Max Voltage (V) | 250 |
| Height (mm) | 15.2 |
| Standard Colour | Black |
| Length (mm) | 58.5 |
| Solder Pin Length (mm) | 3.5 |
| PCB Hole Diameter (mm) | 1.2 |
| Comments | Pole sizes / no of ways not shown, please contact us for availability |
| IP Rating | 20 |
| Min Temperature Rating °C | 16 |
| Min Wire Size AWG | 28 |
| Pin Style | Solderable |
| Tracking Resistance CTI (v) | 600 |