
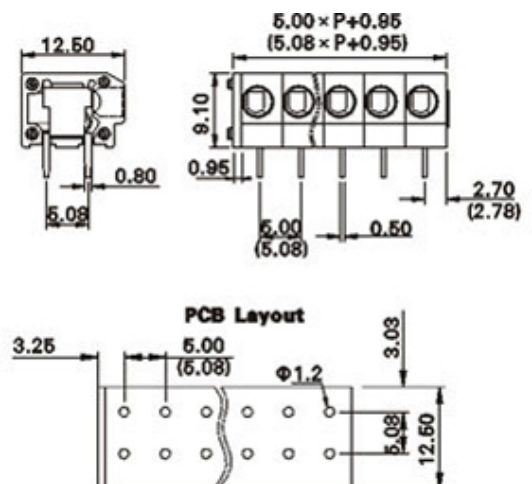


Screwless - Push Wire

Range: PCB Terminal Blocks, Connectors and Fuse Holders

Part Number: TLM302R-11P

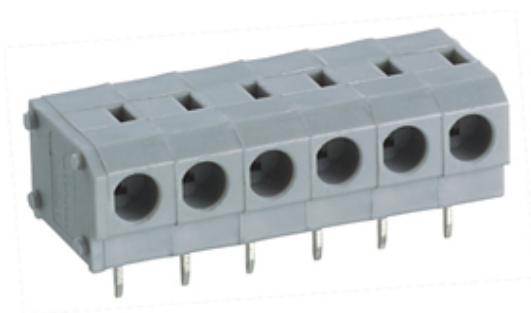

DESCRIPTION

11 Pole Spring - Screwless Tool operated Wave - through hole Horizontal 5.08mm pitch 10A 300V

*Subject to technical modification without notice.
Typographical and other errors do not justify claim for damages.*

SPECIFICATION

Type	Spring - Screwless
Connection Method	Tool operated
Mounting Type	Wave - through hole
Orientation	Horizontal
Join	End stackable
Pitch (mm)	5.08
Number of Poles	11
Min Wire Size (Sq mm)	0.5
Max Wire Size (Sq mm)	1.5
Max Current (A)	10
Max Voltage (V)	300
Height (mm)	13.1
Standard Colour	Grey
Width (mm)	12.5
Length (mm)	56.88
Solder Pin Length (mm)	3.6
PCB Hole Diameter (mm)	1.2
Approvals Pending	UL Pending
Body Material	PA66 V0
Comments	Pole sizes / no of ways not shown, please contact us for availability
Min Temperature Rating °C	-40
Max Temperature Rating °C	105
Min Wire Size AWG	20
Max Wire Size AWG	14