




# Pluggable Pin Header (Male) - Single Row PCB Header

Range: PCB Terminal Blocks, Connectors and Fuse Holders

Part Number: TLPHC-100V-06P

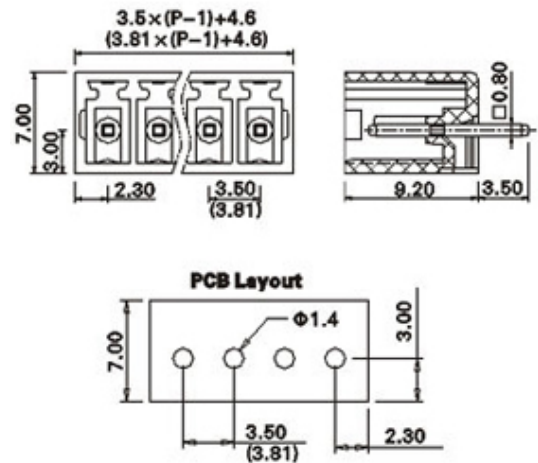

## DESCRIPTION

6 Pole PCB mount - Male header Wave - through hole Vertical 3.81mm pitch 8A(UL)/10A(VDE) 300V(UL) 150V(VDE)

*Subject to technical modification without notice.  
Typographical and other errors do not justify claim for damages.*

## SPECIFICATION

|                                  |   |
|----------------------------------|---|
| <b>Type</b>                      | PCB mount - Male header   |
| <b>Mounting Type</b>             | Wave - through hole   |
| <b>Orientation</b>               | Vertical  |
| <b>Join</b>                      | Solid body non stackable  |
| <b>Pitch (mm)</b>                | 3.81  |
| <b>Open/Closed/Screw/Flange</b>  | Closed End  |
| <b>Number of Poles</b>           | 6   |
| <b>Max Current (A)</b>           | 8A(UL)/10A(VDE)   |
| <b>Max Voltage (V)</b>           | 300V(UL) 150V(VDE)  |
| <b>Height (mm)</b>               | 9.2   |
| <b>Standard Colour</b>           | Green   |
| <b>Width (mm)</b>                | 7   |
| <b>Length (mm)</b>               | 23.65   |
| <b>Solder Pin Length (mm)</b>    | 3.5   |
| <b>PCB Hole Diameter (mm)</b>    | 1.4   |
| <b>Body Material</b>             | PA66 V0   |
| <b>Comments</b>                  | Pole sizes / no of ways not shown, please contact us for availability |
| <b>Min Temperature Rating °C</b> | -40   |
| <b>Max Temperature Rating °C</b> | 105   |

## INDUSTRY ACCREDITATIONS

