


# Contactors

## Range: Motor Control Gear

Order Code: DEC-25D10/415VAC

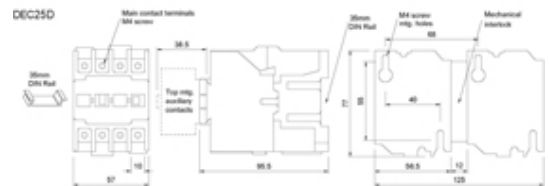

### DESCRIPTION

3 pole contactor, AC1 40A,415V AC coil

### MOTOR CONTROL GEAR FEATURES

- CSA, CE, UL(listed)
- C/W instantaneous auxiliary contact
- Temperature range of -20°C to +85°C
- Combi Head Ready to Tighten Screws
- Compact design
- Heavy duty pure silver point contact
- IP20 finger protected screws

*Subject to technical modification without notice.*

*Typographical and other errors do not justify claim for damages.*

## SPECIFICATION

|                                 |       |
|---------------------------------|-------|
| Weight                          | 0.525 |
| Length (mm)                     | 77    |
| Width (mm)                      | 56.5  |
| Height (mm)                     | 95.5  |
| AC1 duty Ø less than/equal 40°C | 40    |
| Three Phase Load at 240V (kW)   | 7.5   |
| Three Phase Load at 380V (kW)   | 15    |
| Three Phase Load at 400V (kW)   | 15    |
| Three Phase Load at 440V (kW)   | 15    |
| Three Phase Load at 575V (kW)   | 15    |
| Single Phase Load at 120V (kW)  | 2.2   |
| Single Phase Load at 240 V (kW) | 4     |
| Aux Contact Number              | 1     |
| Aux Contact Type                | N/O   |
| Series                          | DEC   |
| Voltage (VAC)                   | 415   |

## INDUSTRY ACCREDITATIONS

