
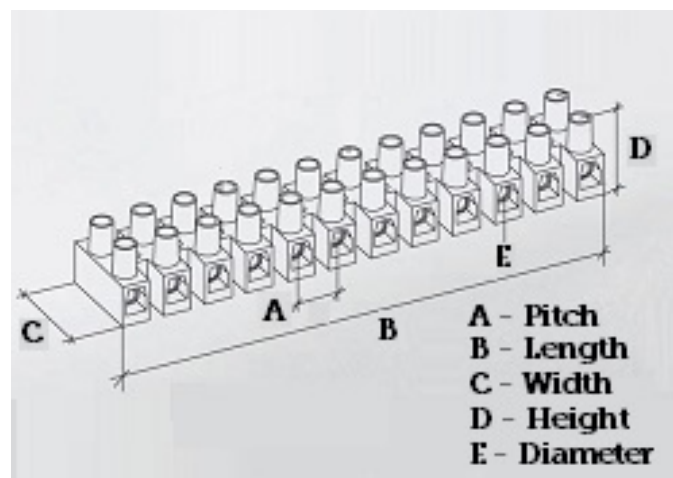


# Pillar Terminal Blocks

## Range: Emech Terminals/Accessories

Order Code: CTS-IGA-S08-W10 (HY431/1 FVLP)

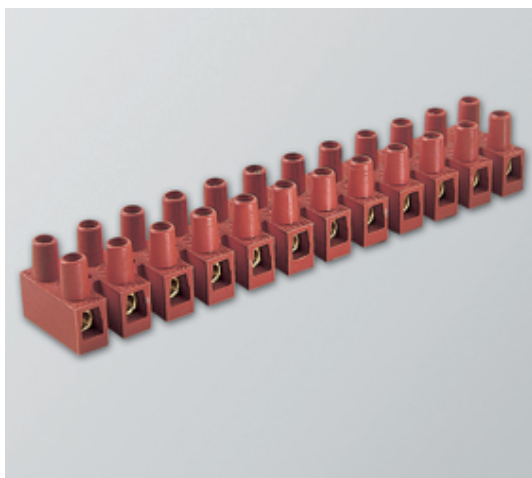

### DESCRIPTION

A 1-pole, high temperature terminal strip, reinforced with 25% Fibreglass, wire protected

### EMECH TERMINALS/ACCESSORIES FEATURES

- High Quality Terminal Strip for use in High Temperature applications
- Material: Polyamide PA6.6 with 25% fibreglass reinforcement
- High Temperature Specification: 200°C short term, 150°C working temperature
- Flammability rating: UL94-V0 (Self Extinguishing)
- Glow Wire Tested: GWIT775 & GTW750 - IEC 60335-1 ed.IV (EN60695-2-11 no flame within 2 seconds on piece)
- Certification: VDE, CE, cURus
- Design: Standard base, wire protected

*Subject to technical modification without notice.*

*Typographical and other errors do not justify claim for damages.*

## SPECIFICATION

Number of Poles	1
Terminal Material	OT58 nickel plated
Terminal Type	Wire Protected
Body Material	Polyamide PA6.6, with 25% glass fibre reinforced
Colour	Red-brown
Glow Wire Resistance Test Temp	GWT750°C in 2 sec (EN60695-2-11)
Max Conductor Size (Sq mm)	1.5
Max Current (A)	17.5
Max Voltage (V)	450
Working Temperature	150
Pitch (mm)	8
Height (mm)	15
Width (mm)	16.5
Length (mm)	6.5
Diameter (mm)	2.6
Terminal Screw Material	White zinc plated steel
Wire Protection Material	Stainless steel

## INDUSTRY ACCREDITATIONS

