
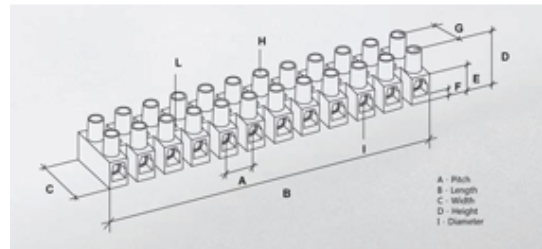


## HY431/2 FVLP

2 pole red-brown polyamide PA6.6, with 25% glass fibre reinforced wire protected pillar terminal block 8mm pitch 17.5a 450v

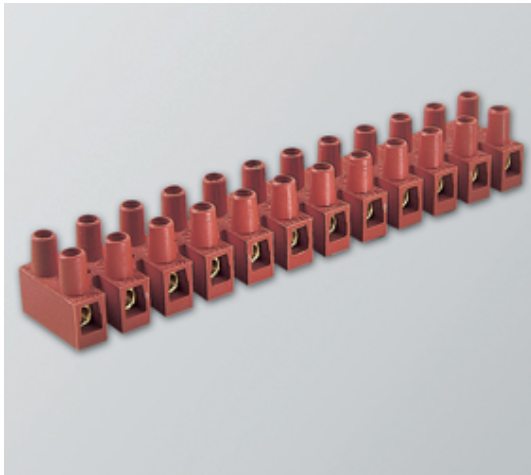

### SPECIFICATION

<b>Number of Poles</b>	2
<b>Terminal Material</b>	OT58 nickel plated
<b>Terminal Type</b>	Wire Protected
<b>Body Material</b>	Polyamide PA6.6, with 25% glass fibre reinforced
<b>Colour</b>	Red-brown
<b>Glow Wire Resistance Test Temp</b>	GWT750°C in 2 sec (EN60695-2-11)
<b>Max Conductor Size (Sq mm)</b>	1.5
<b>Max Current (A)</b>	17.5
<b>Max Voltage (V)</b>	450
<b>Working Temperature</b>	150
<b>Pitch (mm)</b>	8
<b>Height (mm)</b>	15
<b>Width (mm)</b>	16.5
<b>Length (mm)</b>	14.5
<b>Diameter (mm)</b>	2.6
<b>Terminal Screw Material</b>	White zinc plated steel
<b>Wire Protection Material</b>	Stainless steel