
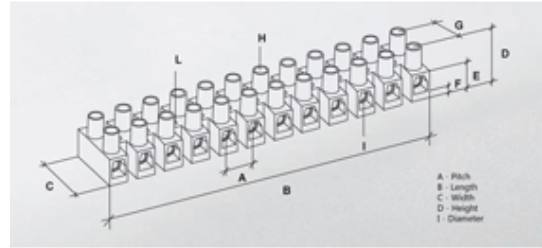


## HY431/2 FVLP

2 pole red-brown polyamide PA6.6, with 25% glass fibre reinforced wire protected pillar terminal block 8mm pitch 17.5a 450v

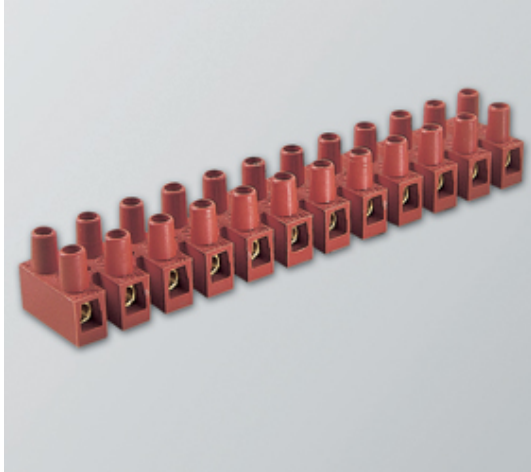

### SPECIFICATION

Number of Poles	2
Terminal Material	OT58 nickel plated
Terminal Type	Wire Protected
Body Material	Polyamide PA6.6, with 25% glass fibre reinforced
Colour	Red-brown
Glow Wire Resistance Test Temp	GWT750°C in 2 sec (EN60695-2-11)
Max Conductor Size (Sq mm)	1.5
Max Current (A)	17.5
Max Voltage (V)	450
Working Temperature	150
Pitch (mm)	8
Height (mm)	15
Width (mm)	16.5
Length (mm)	14.5
Diameter (mm)	2.6
Terminal Screw Material	White zinc plated steel
Wire Protection Material	Stainless steel