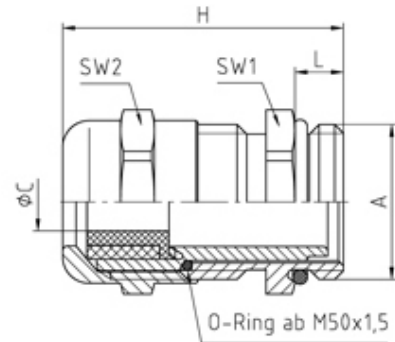


**50.625 M/R**

Perfect cable gland with reducer insert M25X1,5 thread length 7, min/max cable dia 8-16


**SPECIFICATION**

|  |   |
|--|---|
| <b>Product Type</b>                    | Standard  |
| <b>Body Material</b>                   | Nickel Plated Brass   |
| <b>Min Temperature °C</b>              | -20   |
| <b>Max Temperature °C</b>              | 100   |
| <b>IP Rating</b>                       | 68  |
| <b>Thread Size</b>                     | M25   |
| <b>Clamping Range Min (mm)</b>         | 8   |
| <b>Clamping Range Max (mm)</b>         | 16  |
| <b>Lamellar Insert Material</b>        | Polyamide PA6 V-2   |
| <b>External Connecting Thread Type</b> | Metric  |
| <b>Thread Length (mm)</b>              | 7   |
| <b>Sealing Ring/Inner Part</b>         | Evoprene TPE  |
| <b>Comments</b>                        | details about tests - see annex                               |
| <b>Width Across Flat 1 (mm)</b>        | 27  |
| <b>Width Across Flat 2 (mm)</b>        | 27  |
| <b>Height (mm)</b>                     | 36.5  |
| <b>Connecting Thread Size</b>          | M25x1.5   |
| <b>Sealing Ring/Outer Part</b>         | Polychloroprene-Nitrile rubber CR/NBR                         |
| <b>Additional Material Detail</b>      | Body - Brass CuZn39Pb3 nickel plated, O-Ring - Nitrile rubber |
| <b>Standards</b>                       | EN50262/UL514B  |