


50.640 M/zXz

Perfect cable gland M40 with multiple sealing insert, see comments. Thread length 8

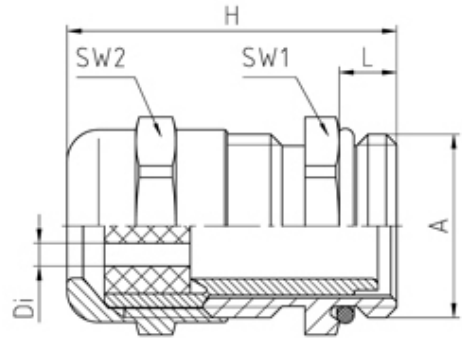

SPECIFICATION

| | |
|--|---|
| Product Type | Standard |
| Body Material | Nickel Plated Brass |
| Min Temperature °C | -20 |
| Max Temperature °C | 100 |
| IP Rating | 65 |
| Thread Size | M40 |
| Lamellar Insert Material | Polyamide PA6 V-2 |
| External Connecting Thread Type | Metric |
| Thread Length (mm) | 8 |
| Sealing Insert | Evoprene TPE |
| Comments | please indicate required sealing insert, e.g. 50.612 M/4x2 |
| Width Across Flat 1 (mm) | 43 |
| Width Across Flat 2 (mm) | 43 |
| Height (mm) | 41 |
| Connecting Thread Size | M40x1.5 |
| Additional Material Detail | Body - Brass CuZn39Pb3 nickel plated, O-Ring - Nitrile rubber |