
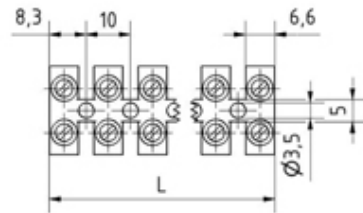


1012913003

CLEARANCE - 3 Pole glass-fibre reinforced polyamide barrier with wire protection insert pillar terminal block 10 mm pitch 32a 450v

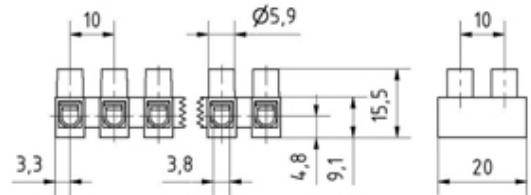

SPECIFICATION

Length (mm)	26.6
Min Conductor Size (Sq mm)	0.75
Max Conductor Size (Sq mm)	4
Max Current (A)	32
Max Voltage (V)	450
Base Type	Standard
Body Material	Polyamide, glass fibre reinforced
Colour	White
Comments	1) Assembly-bore : Diameter 3.5 mm , 2) Photo is just a representative of terminal block, see line drawing
Glow Wire Resistance Test Temp	750 C Flame < 2 Sec (IEC/EN60335-1)
Number of Poles	3
Pitch (mm)	10
Terminal Screw Material	M 3 nickel-plated steel
Terminal Type	Barrier with wire protection
Tracking Resistance CTI (v)	425
Wire Protection Material	Chrome-nickel-steel