


### 50.650 MFK1

Perfect cable gland with flat cable sealing insert M50X1,5 thread length 9, min/max cable dia -4x24

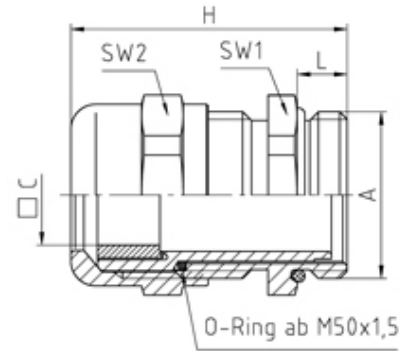

### SPECIFICATION

|  |   |
|--|---|
| <b>Product Type</b>                    | Standard  |
| <b>Body Material</b>                   | Nickel Plated Brass   |
| <b>Min Temperature °C</b>              | -20   |
| <b>Max Temperature °C</b>              | 100   |
| <b>IP Rating</b>                       | 66  |
| <b>Thread Size</b>                     | M50   |
| <b>Clamping Range Max (mm)</b>         | 4x24  |
| <b>Lamellar Insert Material</b>        | Polyamide PA6 V-2   |
| <b>External Connecting Thread Type</b> | Metric  |
| <b>Thread Length (mm)</b>              | 9   |
| <b>Sealing Insert</b>                  | Evoprene TPE  |
| <b>Comments</b>                        | sealing inserts - see WJ-DM xxFK1                             |
| <b>Width Across Flat 1 (mm)</b>        | 55  |
| <b>Width Across Flat 2 (mm)</b>        | 55  |
| <b>Height (mm)</b>                     | 49.5  |
| <b>Connecting Thread Size</b>          | M50x1.5   |
| <b>Additional Material Detail</b>      | Body - Brass CuZn39Pb3 nickel plated, O-Ring - Nitrile rubber |