


FV110

3 Pole screw to tab terminal block

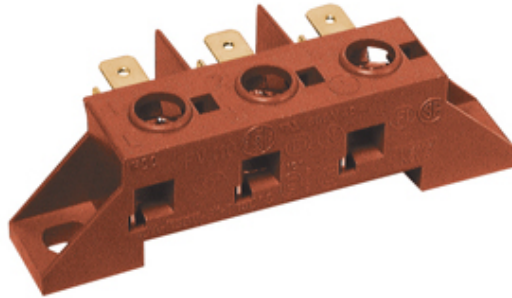

SPECIFICATION

| | |
|----------------------------|-----------------------------------|
| Number of Poles | 3 |
| Tabs Per Pole | 3 |
| Tab Size (mm) | 6.3x0.8 |
| Terminal Material | Zinc-plated steel |
| Body Material | Polyamide, glass fibre reinforced |
| UL94 Rating | UL94V0 |
| Max Conductor Size (Sq mm) | 6 |
| Min Conductor Size AWG | 22 |
| Max Conductor Size AWG | 8 |
| Max Current (A) | 40 |
| Max Voltage (V) | 450 |
| Minimum Temp Rating °C | -5 |
| Maximum Temp Rating °C | 150 |
| Pitch (mm) | 17.7 |
| Height (mm) | 24 |
| Width (mm) | 31.5 |
| Length (mm) | 81.3 |
| Accessories Available | PA269 |

DISTRIBUTORS

