


## 50.632 M/EMV

Perfect cable gland EMV M32X1,5 thread length 8, min/max cable dia 14-21

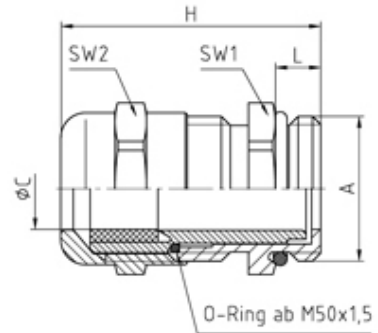

### SPECIFICATION

|  |   |
|--|---|
| <b>Product Type</b>                    | EMV/EMC   |
| <b>Sealing Ring Material</b>           | Polychloroprene-Nitrile rubber CR/NBR                         |
| <b>Body Material</b>                   | Nickel Plated Brass   |
| <b>Min Temperature °C</b>              | -20   |
| <b>Max Temperature °C</b>              | 100   |
| <b>IP Rating</b>                       | 68  |
| <b>Thread Size</b>                     | M32   |
| <b>Clamping Range Min (mm)</b>         | 14  |
| <b>Clamping Range Max (mm)</b>         | 21  |
| <b>Lamellar Insert Material</b>        | Polyamide PA6 V-2   |
| <b>External Connecting Thread Type</b> | Metric  |
| <b>Thread Length (mm)</b>              | 8   |
| <b>Comments</b>                        | details about tests - see annex                               |
| <b>Width Across Flat 1 (mm)</b>        | 34  |
| <b>Width Across Flat 2 (mm)</b>        | 34  |
| <b>Height (mm)</b>                     | 38  |
| <b>Connecting Thread Size</b>          | M32x1.5   |
| <b>Additional Material Detail</b>      | Body - Brass CuZn39Pb3 nickel plated, O-Ring - Nitrile rubber |
| <b>Standards</b>                       | EN50262/UL514B  |