


Dual Pushbutton, Single Switch Housing

Range: Control Stations

Part Number: 2DE.01.10AB

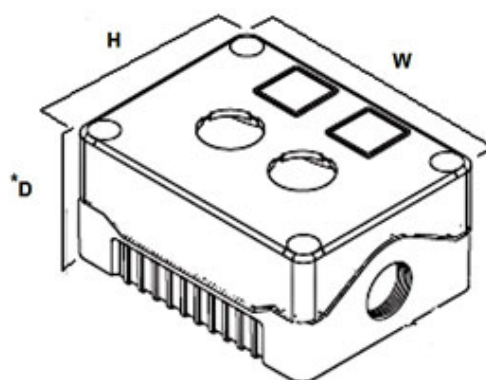

*Enclosure only except 1DE .SP series where D includes actuator height

DESCRIPTION

Grey cover, black base, double push button red/green

*Subject to technical modification without notice.
Typographical and other errors do not justify claim for damages.*

CONTROL STATIONS FEATURES

- Customised control station service available - please ask for details.
- Insulation resistance - $>100\text{M}\Omega$ @ 500VDC
- Enclosures sealed up to IP56
- Unique snap on Din Rail and Flange brackets
- Dust & waterproof for short-term submersion
- 4 sizes available! Accepting 1-4 push button switches
- 2 contact blocks fitted as standard
- Different voltage ratings are available
- Contact material - Silver Bifurcated and serrated
- Operating Temperature -10 to $+65^{\circ}\text{C}$
- Contact rating - AC12 Resistive / AC15 Electromagnetic - 240V (3A) / 415V (1.5A)
- Mechanical life - 1 million operations

Features may vary by product throughout the range.

SPECIFICATION

Accessories Available	DIN rail and flange snap-on brackets
Base Colour	Black
Base Style	Deep base
Depth (mm)	78
Enclosure Material	ABS-UL94-HB
Height (mm)	80
IP Rating	IP56
Lid Colour	Grey
Min Temperature Rating °C	-10
Max Temperature Rating °C	65
Number of Switches	1
Size (mm)	80x73x78
Switch 1 Legend Sticker	O I
Switch 1 Style	Pushbutton non-illuminated
Switch 1 Substyle	Dual pushbutton red/green, single switch housing
Width (mm)	73