


# TeeTube

## Range: Weatherproof/Waterproof Connectors

Order Code: THB.390.B3A



Product Image  
Not Available

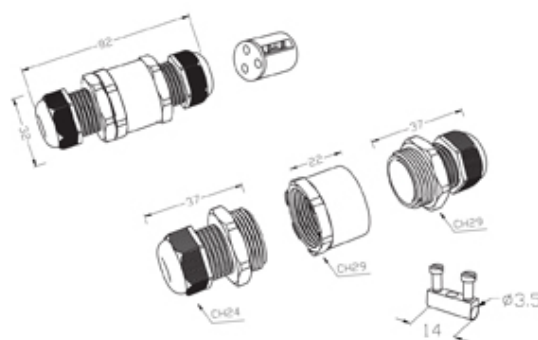

### DESCRIPTION

TeeTube Mini "Elbow shape" 3 Pole Screw - wp 7mm to 13.5mm, 2.5 mm max conductor size IP68 24A 450V 2 cable entries

### WEATHERPROOF/WATERPROOF CONNECTORS FEATURES

- Tough, robust construction with large cable range acceptance
- Straight through, T splitter and Y splitter versions available
- Dual terminal versions available for easy fitting and looping of conductors (2+2 and 3+3 poles)
- Temperature rating of -40°C to +125°C

*Features may vary by product throughout the range.*

*Subject to technical modification without notice.*

*Typographical and other errors do not justify claim for damages.*

MAKING THE **RIGHT** CONNECTIONS



## SPECIFICATION

|                             |  |
|-----------------------------|--|
| Type                        | Joint connector (re-usable/re-accessible)  |
| Colour                      | Black  |
| Length (mm)                 | 73   |
| Width (mm)                  | 32   |
| Depth (mm)                  | 61   |
| Cable Entries               | 2  |
| Max Current (A)             | 24   |
| Max Voltage (V)             | 450  |
| Number of Poles             | 3  |
| Min Conductor Size (Sq mm)  | 0.25   |
| Max Conductor Size (Sq mm)  | 2.5  |
| Minimum Cable Diameter (mm) | 7  |
| Maximum Cable Diameter (mm) | 13.5   |
| IP Rating                   | 68   |
| Min Temperature Rating °C   | -40  |
| Max Temperature Rating °C   | 125  |
| Temperature "T" Rating      | T85  |
| Body Material               | PA66 GF UL94 V0 GWT 960Â°C   |
| Corrosion Resistance        | Salt mist, 1.000 ore, 5% salt solutions, 35Â°C EN60068-2-11:2000, Test Ka (168h) |
| Fixing System               | Cable  |
| Terminal Type               | Screw with push-wire clamp (M3 - max. 0.5 Nm)                                    |

## INDUSTRY ACCREDITATIONS

