


# Gel Filled

## Range: Weatherproof/Waterproof Connectors

Order Code: CGL-I4A-S04 (5625/415///221)

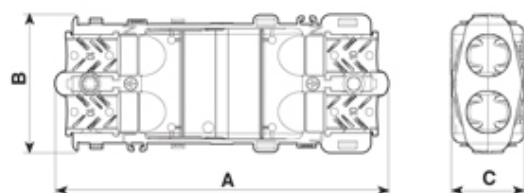

Dimensioni / Dimensions (mm)

| A   | B  | C  |
|-----|----|----|
| 105 | 44 | 24 |

Max volume interno disponibile ~ 14,26cm<sup>3</sup>

Max internal room available ~ 14.26cm<sup>3</sup>

### DESCRIPTION

Paguro gel connector junction box black, 4 cable entry 6.5-12mm cable with 4 pole terminal block

### WEATHERPROOF/WATERPROOF CONNECTORS FEATURES

- Patented memory Gel
- Can be rewired without renewal of internal Gel
- IP68 Protection as standard
- Supplied complete with connector
- Ideal for external connection applications
- The products can be buried without moisture ingress problems
- Up to 16 Amp current capability, depending on product

*Features may vary by product throughout the range.*

*Subject to technical modification without notice.*

*Typographical and other errors do not justify claim for damages.*

## SPECIFICATION

|                                    |                                    |
|------------------------------------|------------------------------------|
| <b>Colour</b>                      | Black                              |
| <b>Length (mm)</b>                 | 105                                |
| <b>Width (mm)</b>                  | 44                                 |
| <b>Depth (mm)</b>                  | 24                                 |
| <b>Cable Entries</b>               | 4                                  |
| <b>Max Current (A)</b>             | 16                                 |
| <b>Max Voltage (V)</b>             | 250                                |
| <b>Number of Poles</b>             | 4                                  |
| <b>Max Conductor Size (Sq mm)</b>  | 2.5                                |
| <b>Minimum Cable Diameter (mm)</b> | 6.5                                |
| <b>Maximum Cable Diameter (mm)</b> | 12                                 |
| <b>IP Rating</b>                   | 68                                 |
| <b>Min Temperature Rating °C</b>   | -30                                |
| <b>Max Temperature Rating °C</b>   | 130                                |
| <b>Body Material</b>               | Nylon PA66-RV V0                   |
| <b>Fixing System</b>               | Cable                              |
| <b>Gel Material</b>                | Sealing bi-component syliconic gel |
| <b>Terminal Type</b>               | Screw - wp                         |