

Need a high performance
and cost effective

Rotary Isolator Switch?

IP66/67



FEATURES

IP66/67

AC & DC RANGE

FLAME RETARDANT UL94V-0


4-POLE + EARTH INCLUDED

LARGE HOUSING – SUPERIOR CABLE MANAGEMENT

BEST PRICE PERFORMANCE ON UK MARKET

ROBUST POLYCARBONATE HOUSING

TUV & UL APPROVED

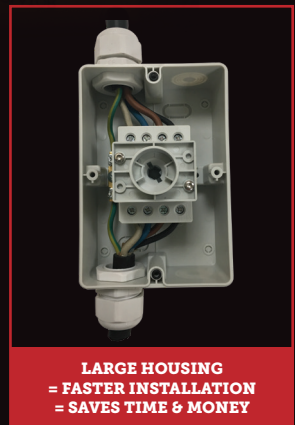

**LARGE HOUSING
= FASTER INSTALLATION
= SAVES TIME & MONEY**

debox

A Brand of Hylec-APL Ltd.

IP66/IP67 RATED

AC & DC models are both IP66/67 rated - completely preventing dust and dirt ingress and providing protection from water up to a depth of 1m.

FLAME RETARDANT

Manufactured from completely flame retardant polycarbonate rated to UL94V-0; Hylec Isolator Switches provide an additional and often vital margin of safety over competitive products with a lower flame-resistance rating.

LARGE HOUSING

Housed in a larger sized casing, Hylec Isolator Switches have more room to make installation that much easier and faster; saving you time and money.

SUITABLE FOR MULTIPLE APPLICATIONS

Available in a wide range of specifications, they provide a compact, visible and extremely reliable solution in all commercial and industrial environments.

SAFE & RELIABLE

When used as an emergency stop, it can be locked in the off position using a padlock (not supplied). For safety, the switch is interlocked with the lid to prevent opening while in the "on" position.

Product Dimensions: AC

AC	PART CODE	W	H	L
20A	DE1S.04.20AC	98	80	145
25A	DE1S.04.25AC	98	80	145
32A	DE1S.04.32AC	98	80	145
40A	DE1S.04.40AC	98	80	145
63A	DE1S.04.63AC	98	81	180

EXTENSIVE RANGE

Available as both AC & DC models.

HIGH VISIBILITY

Housing is robust and highly visible, with yellow covers and red control switches, making them easy to identify when an emergency stop is required.

4-POLE AS STANDARD

The interior mechanism is a 4-pole rotary isolator switch disconnecter used to switch power to commercial or light industrial applications.

EARTH TERMINAL INCLUDED

Featuring silver-plated alloy contacts for high reliability, earth terminals are included, as well as captive retained cover screws.

AC

20A, 25A, 32A, 40A & 63A

DC

16A, 25A & 32A

Product Dimensions: DC

DC	PART CODE	W	H	L
16A	DE1S.04.16DC	98	81	180
25A	DE1S.04.25DC	98	81	180
32A	DE1S.04.32DC	98	81	180

