


# Technical Information:

## PCB Fuse Holders

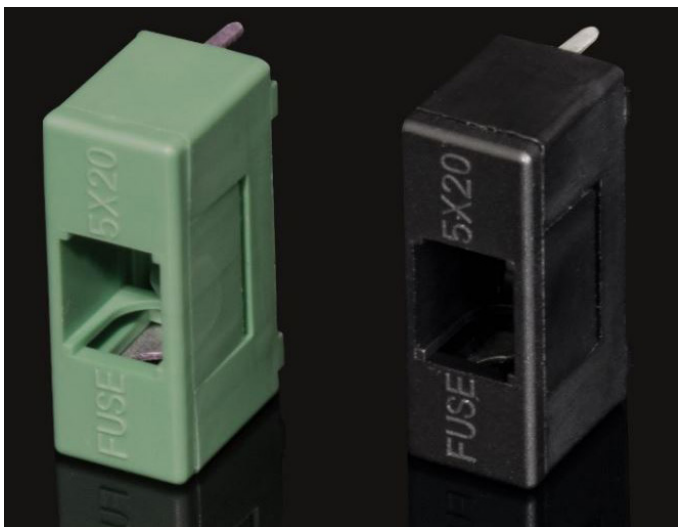

### FEATURES

INSULATED FUSE CARRIER

RETAINER WITH FINGER PROOF

ENCLOSED CONTACTS

PCB MOUNTING WITH 22.6MM PIN PITCH


MOLDED IN FLAME RETARDANT UL94V-0 POLYAMIDE

MANUFACTURED IN ACCORDANCE WITH IEC 127-6

UL APPROVED

AVAILABLE IN GREEN & BLACK

Product Code	Colour	Rating	Contacts Material	Contact Resistance	Body Material	Dielectric Strength	Power Dissipation	PCB hole size	Insulation Resistance
DFH14NG	Green	6.3A / 250V	Tinned Nickel Plated Brass	<5mΩ	UL94V-0 Flame Retardant PA	3KV/60°	2.5W	1.5mm	100MΩ
DFH14HBNG	Green	6.3A / 250V	Tinned Nickel Plated Brass	<5mΩ	UL94V-0 Flame Retardant PA	3KV/60°	2.5W	1.5mm	100MΩ
DFH14N	Black	6.3A / 250V	Tinned Nickel Plated Brass	<5mΩ	UL94V-0 Flame Retardant PA	3KV/60°	2.5W	1.5mm	100MΩ
DFH14HBN	Black	6.3A / 250V	Tinned Nickel Plated Brass	<5mΩ	UL94V-0 Flame Retardant PA	3KV/60°	2.5W	1.5mm	100MΩ



Dimensions



Fuse Holder



Fuse Cover