

CONNECTION BOX - SCREWLESS

CONNECTION BOX - SCREWLESS



OVERVIEW

Connection box with both screw-to-tab and tab-to-tab terminals. Suitable for connecting multiple cables indoors where IP30 or lower is required.


Tab 6,3 x 0,8 mm in zinc plated steel

FEATURES

Ingress Rating: IP30
Termination Material: Zinc Plated Steel
Body Material: Polyamide PA6
Flammability Rating: UL94-V2
Electrical / Wire Rating: 1.5mm ² - 17.5A - 450V 22-12AWG - 20A - 300V
Temperature Rating: 140°C
Strain Relief Screw: Supplied Loose (in bag)
Supplied: Lid Semi Closed + Terminals Fixed

Terminal A	Terminal B	Terminal C
		
Pitch: 12mm		
Length: 115mm		
Width: 66mm		
Height: 21.5mm		
Fixing Hole: 5.5mm		
Fixing Hole Interaxis: 80mm		
Screw (Phase): M4		
Screw (Clamp): M3.5		
Terminal Configuration: 3A + 1B + 2C		

www.hylec-apl.com | sales@hylec-apl.com | 01933 234400

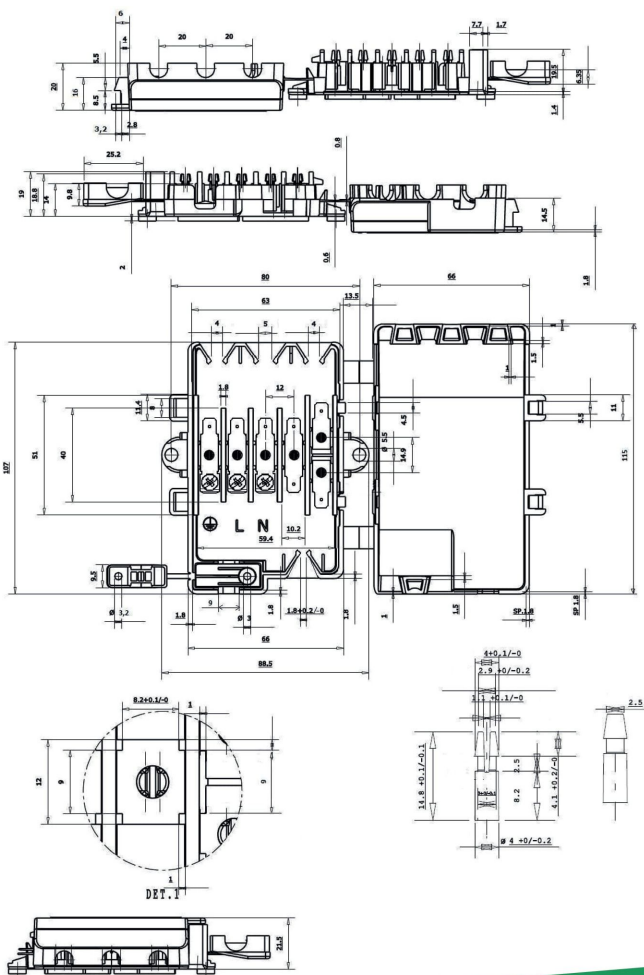

www.hylec-apl.com | sales@hylec-apl.com | 01933 234400

