



- Company
- Products
- Quality
- Jobs/Career
- News
- Contact

Cable Glands | Measuring devices and controls

- Cable glands and accessories with metric thread
- Cable glands and accessories with Pg-thread
- Cable glands and accessories with NPT- and gas pipe thread
- Explosion-proof cable glands and accessories acc. to ATEX
- HAWKE products
- Technical information

- Brass
- Stainless Steel
- Zinc die-casting
- Plastics
- Accessories from other materials
- Cable gland
- Accessories
- PERFECT
- PERFECT EMV
- WADI
- UNI Dicht
- KOMPAKT
- FAVORIT
- Cable gland with clamping jaw
- Basic
- Flat cable gland

Cable glands and accessories with metric thread • Brass • Cable gland • Basic

[BASIC cable gland simple sealing ring /](#)

[Characteristics / Overview](#)


Configuration

Washers	Steel, zinc-plated
Sealing ring	SBR/NBR
Gland body	Brass CuZn39Pb3, nickel-plated
Connecting thread	metric as per EN 60423

Properties

Temperature range	-30°C / +100°C
Protection grade	IP55

Characteristics

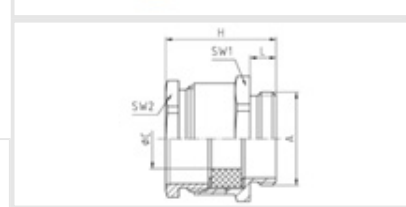

[Metric catalogue download \(8,5 MB\)](#)

[Pg. NPT catalogue download \(7,4 MB\)](#)

[General terms and conditions](#)

[Metal surcharge](#)

[Ex-catalogue \(english\) download](#)

[Ex catalogue download \(2,1](#)

## Connecting thread standard length

A	C mm	L mm	SW1 mm	SW2 mm	H mm	VPE	Art.-Nr. / Part No.
M12x1,5	5 - 7	6	14	13	21,5	100	6307M12
M12x1,5	6 - 8	6	17	15	22,5	100	6309M12
M16x1,5	8 - 10	6	20	18	23,5	100	6311M16
M20x1,5	8 - 10	6,5	22	18	24	50	6311M20
M20x1,5	10 - 12	6,5	22	20	25,5	50	6313M20
M25x1,5	12 - 14	7	27	22	27	50	6316M25
M25x1,5	15 - 17	7	30	28	29,5	50	6321M25
M32x1,5	24 - 26	8	40	37	32,5	25	6329M32
M40x1,5	28 - 30	8	43	37	32,5	25	6329M40
M50x1,5	31 - 33	9	55	47	38,5	10	6336M50
M50x1,5	39 - 41	9	57	54	42,5	5	6342M50
M63x1,5	45 - 47	10	65	60	45	5	6348M63

## Connecting thread long

A	C mm	L mm	SW1 mm	SW2 mm	H mm	VPE	Art.-Nr. / Part No.
M12x1,5	5 - 7	15	14	13	30,5	100	156307M12
M12x1,5	6 - 8	15	17	15	31,5	100	156309M12
M16x1,5	8 - 10	15	20	18	32,5	100	156311M16
M20x1,5	8 - 10	15	22	18	32,5	50	156311M20
M20x1,5	10 - 12	15	22	20	34	50	156313M20
M25x1,5	12 - 14	15	27	22	35	50	156316M25
M25x1,5	15 - 17	15	30	28	37,5	50	156321M25
M32x1,5	24 - 26	15	40	37	39,5	25	156329M32
M40x1,5	28 - 30	15	43	37	39,5	25	156329M40
M50x1,5	31 - 33	15	55	47	44,5	10	156336M50
M50x1,5	39 - 41	15	57	54	48,5	5	156342M50
M63x1,5	45 - 47	15	65	60	50	5	156348M63

MB)

Search

Imprint

Privacy

Print