



Cable Glands | Measuring devices and controls

- Cable glands and accessories with metric thread
- Cable glands and accessories with Pg-thread
- Cable glands and accessories with NPT- and gas pipe thread
- Explosion-proof cable glands and accessories acc. to ATEX
- HAWKE products
- Technical information

- Brass
- Stainless Steel
- Zinc die-casting
- Plastics
- Accessories from other materials
- Cable gland
- Accessories
- PERFECT
- PERFECT EMV
- WADI
- UNI Dicht
- KOMPAKT
- FAVORIT
- Cable gland with clamping jaw
- Basic
- Flat cable gland

BASIC cable gland - sealing ring with multiple perforation /


[Characteristics / Overview](#)

Configuration

Washers	Steel, zinc-plated
Sealing ring	SBR/NBR, multiple perforation
Gland body	Brass CuZn39Pb3, nickel-plated
Connecting thread	metric as per EN 60423

Properties

Temperature range	-30°C / +100°C
Protection grade	IP55
Comment	cable gland sizes M12x1,5 to M40x1,5 are with silicone rubber sealing ring for application in larger temperature range (-55°C / +175°C) are available upon request, silicone rubber sealing rings - see page 119

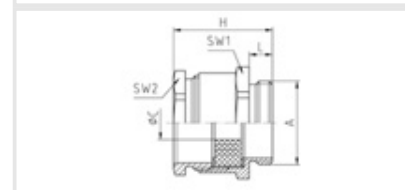

Characteristics

Connecting thread standard length

A	C mm	L mm	SW1 mm	SW2 mm	H mm	VPE	Art.-Nr. / Part No.
M12x1,5	4 - 8	6	17	15	22,5	100	6309M12UG
M16x1,5	6 - 12	6	20	18	23,5	100	6311M16UG
M20x1,5	6 - 12	6,5	22	18	24	50	6311M20UG
M20x1,5	8 - 13	6,5	22	20	25,5	50	6313M20UG
M25x1,5	7 - 15	7	27	22	27	50	6316M25UG
M25x1,5	9 - 19	7	30	28	29,5	50	6321M25UG
M32x1,5	17 - 27	8	40	37	32,5	25	6329M32UG
M40x1,5	17 - 28	8	43	37	32,5	25	6329M40UG
M50x1,5	23 - 33	9	55	47	38,5	10	6336M50UG
M50x1,5	29 - 39	9	57	54	42,5	5	6342M50UG
M63x1,5	35 - 46	10	65	60	45	5	6348M63UG

Connecting thread long

A	C mm	L mm	SW1 mm	SW2 mm	H mm	VPE	Art.-Nr. / Part No.
M12x1,5	4 - 8	15	17	15	31,5	100	156309M12UG
M16x1,5	6 - 12	15	20	18	32,5	100	156311M16UG
M20x1,5	6 - 12	15	22	18	32,5	50	156311M20UG
M20x1,5	8 - 13	15	22	20	34	50	156313M20UG
M25x1,5	7 - 15	15	27	22	35	50	156316M25UG
M25x1,5	9 - 19	15	30	28	37,5	50	156321M25UG
M32x1,5	17 - 27	15	40	37	39,5	25	156329M32UG
M40x1,5	17 - 28	15	43	37	39,5	25	156329M40UG
M50x1,5	23 - 33	15	55	47	44,5	10	156336M50UG
M50x1,5	29 - 39	15	57	54	48,5	5	156342M50UG
M63x1,5	35 - 46	15	65	60	50	5	156348M63UG

[Metric catalogue download \(8,5 MB\)](#)[Pg. NPT catalogue download \(7,4 MB\)](#)[General terms and conditions](#)[Metal surcharge](#)[Ex-catalogue \(english\) download](#)[Ex catalogue download \(2,1 MB\)](#)

Search

[Imprint](#)[Privacy](#)[Print](#)