

Terminal blocks

to Type 374

ASP051 page 43

Type 374


Header, centerline 2.5 mm / 0.098 inches, horizontal mounting, square pins 0.8 mm / 0.031 inches, closed ends

Technical Data

RIAs V / A 150 / 5
 Ⓢ 130 V / 2.5 kV / 4 A

Insulation co-ordination according to EN 60664-1
 Clearance and creepage distances min. 1.7 mm
 Insulating material class CTI 600
 Overvoltage category III III II
 Pollution degree 3 2 2
 Rated voltage 80 320 320
 Rated test voltage 0.8 4 2.5
 Protection category according to IEC 60529 IP00
 Solder pin dimension 0.8 x 0.8 mm
 Recommended pc board hole dia. Ø 1.3 mm
 Solder pin length 3.2 mm
 Pole size 2 - 12
 Colour green

Dimensions in mm 1 mm = 0.0394 in.

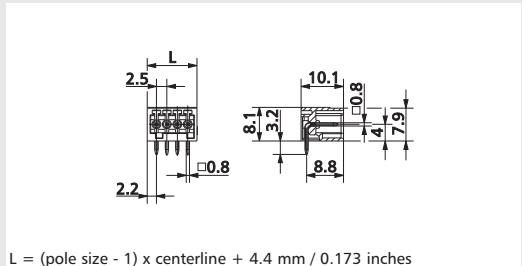

$L = (\text{pole size} - 1) \times \text{centerline} + 4.4 \text{ mm} / 0.173 \text{ inches}$

Part numbers (P/N) (informations: page 110)

Complete the part number by adding the pole size.

Type 374

centerline 2.5 mm / 0.098 inches

P/N 313741

	02	03	04	05	06	07	08
09	10	11	12				

- Standard pole sizes
- Available on demand. Minimum order quantity 5000 pieces per item.