


Gel Filled

Range: Weatherproof/Waterproof Connectors

Order Code: CGL-I4B-S03 (5660/4///221)

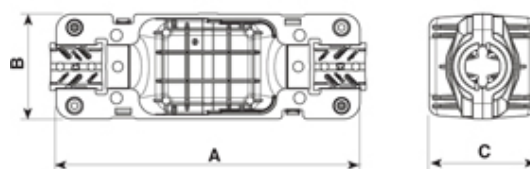

Dimensioni / Dimensions (mm)

| A | B | C |
|-----|----|----|
| 120 | 40 | 41 |

Max volume interno disponibile ~ 25,92cm³

Max internal room available ~ 25.92cm³

DESCRIPTION

Paguro gel connector junction box black, 4 cable entry 7.5-16mm cable with 3 pole terminal block

WEATHERPROOF/WATERPROOF CONNECTORS FEATURES

- Patented memory Gel
- Can be rewired without renewal of internal Gel
- IP68 Protection as standard
- Supplied complete with connector
- Ideal for external connection applications
- The products can be buried without moisture ingress problems
- Up to 16 Amp current capability, depending on product

Features may vary by product throughout the range.

Subject to technical modification without notice.

Typographical and other errors do not justify claim for damages.

SPECIFICATION

| | |
|------------------------------------|------------------------------------|
| Colour | Black |
| Length (mm) | 138 |
| Width (mm) | 78 |
| Depth (mm) | 35 |
| Cable Entries | 4 |
| Max Current (A) | 16 |
| Max Voltage (V) | 250 |
| Number of Poles | 3 |
| Max Conductor Size (Sq mm) | 4 |
| Minimum Cable Diameter (mm) | 7.5 |
| Maximum Cable Diameter (mm) | 16 |
| IP Rating | 68 |
| Min Temperature Rating °C | -30 |
| Max Temperature Rating °C | 130 |
| Body Material | Nylon PA66 V0 |
| Fixing System | Cable |
| Gel Material | Sealing bi-component syliconic gel |
| Terminal Type | Screw - wp |